

INDUSTRY LEADING CONTROL SYSTEMS

A MESSAGE FROM OUR GROUP CEO

It's an exciting time at DSE as we embrace the challenges ahead of us and introduce the latest technology that will shape our future over the coming years.

We are proud of the intelligent range of products we have created across our four core brands. Each one offering market-leading features and benefits that add quality, functionality and reliability to customer applications.

Our customers are at the heart of our business. We work together daily to make sure our product range never stands still. This unique approach ensures we continue to design and manufacture the 'Industry Leading Control Systems' we are renowned for across the world.



David Thomson




SPECIALISTS IN ADDING QUALITY, FUNCTIONALITY AND RELIABILITY TO CUSTOMER APPLICATIONS.

2	Group CEO Message
4	About Us
5	UK Manufacturing
6	Multiple Application Specialists
7	Website
8	DSEgenset®
9	Manual & Auto Start Control Modules
16	Auto Mains (Utility) Failure Control Modules
21	Load Sharing & Synchronising
29	DC / Hybrid Generator Control Modules
33	Digital Automatic Voltage Regulators (AVR)
35	Mains (Utility) Protection Relays & Power Meters
38	Lighting Tower Control Modules
40	Remote Overview Displays
44	Remote Monitoring Software
49	Expansion Modules
54	DSEControl®
55	Vehicle & Off-Highway Machinery Control Systems
62	Engine & Pump Controllers
68	Accessories
70	DSEPower®
71	Four Things to Consider When Selecting a Battery Charger
72	12 Volt Battery Chargers
75	24 Volt Battery Chargers
79	Dual Output Battery Chargers
81	Enclosed Battery Chargers
83	Remote Battery Charger Display Module
84	DSEAts®
85	Automatic Transfer Switch Controllers
90	DSE Technical Support
91	DSE Customer Training

ABOUT US



45 YEARS
INDUSTRY EXPERIENCE



200+
EMPLOYEES



UK DESIGN &
MANUFACTURING




GLOBAL DISTRIBUTOR
NETWORK



OFFICES ACROSS
MULTIPLE CONTINENTS



INDUSTRY-LEADING
CUSTOMER SUPPORT



4 CORE
PRODUCT BRANDS



WORLDWIDE PRODUCT
DISTRIBUTION



SPECIALIST
SALES TEAMS


UK MANUFACTURING

We manufacture all products at our UK Head Office within our bespoke manufacturing facilities. Our commitment to delivering the highest quality & safety standards, combined with our detailed processes, ensures we deliver premium products suitable for multiple application environments across the world.


Quality is embedded in everything we do. The 'Culture of Quality' that is at the heart of our organisation gives customers confidence that our products will never let them down.




STATE OF THE ART SURFACE
MOUNT TECHNOLOGY



AUTOMATED OPTICAL
INSPECTION EQUIPMENT



PREMIUM QUALITY
COMPONENTS



AUTOMATED THROUGH HOLE
PLACEMENT MACHINERY




FULLY AUTOMATED
PRODUCT TESTING




AUTOMATED
PRODUCT PACKING



MULTIPLE APPLICATION SPECIALISTS



GENERATOR
CONTROL



LOAD SHARING
& SYNCHRONISING



DC/HYBRID
GENERATOR CONTROL




MAINS (UTILITY)
PROTECTION




LIGHTING TOWER
CONTROL



ATS
CONTROL




ENGINE
CONTROL



PUMP
CONTROL



DIGITAL
AVR CONTROL



VEHICLE &
OFF-HIGHWAY CONTROL



REMOTE
MONITORING



BATTERY
CHARGING

www.deepseaelectronics.com



Our industry-leading website provides users with access to all the latest DSE product and company information.

Website user accounts can be created to gain access to a wide range of supporting product and training documentation:

Downloads include:

PC Software
Product Manuals
Software Manuals
Training Documentation
Product Certifications
Typical Wiring Diagrams



VISIT US AT

Middle East
Energy Dubai

MARCH 3-5, 2020

BOOTH: **S1 C30**

DSE**Genset**®

DSE**Genset**® is an intelligent range of auto start and auto mains (utility) failure single-set generator control solutions, load sharing & synchronising multi-set control solutions, DC / hybrid generator control solutions, digital automatic voltage regulators (AVR), mains (utility) protection relays & power meters, lighting tower control solutions, remote communications devices & overview displays and expansion modules.

Each range has been designed, developed and manufactured by our industry leading experts, to deliver a range of features and benefits that set new standards across the industry.

SUITABLE FOR:



RENTAL



HYBRID



TELECOMS



DATA CENTRES



HOSPITALS



EVENTS

MANUAL & AUTO START CONTROL MODULES

Communications are a key part of everyday life all over the globe. Remote telecoms sites like this one, located in the Middle East use the **DSE7310 MKII** to control the on-site generators and meet all their power requirements. The **DSE7310 MKII** is fully compatible with our industry-leading remote monitoring software, **DSEWebNet®**. The software allows the site to be monitored and controlled remotely, reducing engineer call-outs. Remote monitoring is suited to this industry, due to the large number of telecoms generators being used in remote locations.

DSE7410 MKII Auto Start Control Module



OVERALL SIZE

245 mm x 184 mm x 51 mm (9.6" x 7.2" x 2.0")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (8)
- Configurable analogue / digital inputs (6)
- Configurable outputs (8)
- Independent fuel & start outputs
- Configurable volt-free outputs (2)

COMMUNICATIONS

- SNMP, GET, SET & TRAP support
- MODBUS TCP IP / MODBUS RTU
- USB for PC configuration
- Simultaneous use of RS485, RS232 & Ethernet ports
- SCADA software
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- Conventional engine support (MPU & Hz)
- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- DSE Configuration Suite PC software

ADVANCED FEATURES

- Embedded web server
- Supports 7 languages
- Advanced protections
- Oil pressure disconnect delay
- Configurable icon screens
- CAN support for DSEA108 AVR
- Charge alternator disable functionality
- Dedicated inputs for ECU specific operations
- Advanced PLC editor
- SMS alerts & control
- Dual mutual standby
- DSENet® expansion compatible



PRODUCT VARIANTS

7410-03 - 7410 MKII Auto Start Control Module

DSE7310 MKII Auto Start Control Module



OVERALL SIZE

245 mm x 184 mm x 51 mm (9.6" x 7.2" x 2.0")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (8)
- Configurable analogue / digital inputs (6)
- Configurable DC outputs (6)
- Independent fuel and start outputs
- Configurable volt-free outputs (2)

COMMUNICATIONS

- Simultaneous use of RS485 & RS232 ports
- MODBUS RTU
- USB for PC configuration
- SCADA software
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- Conventional engine support (MPU & Hz)
- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- DSE Configuration Suite PC software
- Configurable front panel (PIN protected)

ADVANCED FEATURES

- Supports 7 languages
- Advanced protections
- Oil pressure disconnect delay
- Configurable icon screens
- CAN support for DSEA108 AVR
- Charge alternator disable functionality
- Dedicated inputs for ECU specific operations
- Advanced PLC editor
- SMS alerts & control
- Dual mutual standby
- DSENet® expansion compatible



PRODUCT VARIANTS

7310-03 - 7310 MKII Auto Start Control Module

DSE7110 MKII Auto Start Control Module



OVERALL SIZE

240 mm x 181 mm x 42 mm (9.4" x 6.8" x 1.6")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (6)
- Configurable analogue / digital inputs (4)
- Configurable DC outputs (4)
- Configurable volt-free outputs (2)
- Configurable remote start input
- Independent fuel and start outputs
- Configurable staged loading outputs

COMMUNICATIONS

- USB for PC configuration
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- CAN engine support
- Conventional engine support (MPU & Hz)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- 3-phase generator sensing
- Generator / load power & current monitoring
- 0-10 V & 4-20 mA oil pressure sensor support
- Fuel pump control
- Battery voltage monitoring
- Power save mode
- 1 alternative configuration
- Configurable fuel & start outputs when using CAN
- Real-time clock for scheduling and event monitoring

Full list of features available at deepseaelectronics.com



PRODUCT VARIANTS

7110-01 - 7110 MKII Auto Start Control Module

DSE6110 MKIII Auto Start Control Module



PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (8)
- Configurable digital / analogue inputs (4)
- Configurable DC outputs (6)
- Independent fuel and start outputs

COMMUNICATIONS

- USB for PC configuration
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- CAN engine support (Tier 4F / Stage 5)
- Conventional engine support (MPU & Hz)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- PLC editor
- Generator current & power monitoring
- 0-10 V & 4-20 mA oil pressure sensor support
- Fuel level alarms
- 1 alternative configuration
- 3-phase generator sensing & protection
- 5-key menu navigation / front panel breaker control buttons
- Text based display
- DSENet® expansion compatible

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

6110-05 - 6110 MKIII Auto Start Control Module

OVERALL SIZE

216 mm x 158 mm x 43 mm (8.5" x 6.2" x 1.5")

PANEL CUT-OUT SIZE

184 mm x 137 mm (7.2" x 5.3")



DSE4510 MKII Auto Start Control Module



PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (4)
- Configurable analogue / digital inputs (3)
- Configurable DC outputs (4)
- Independent fuel and crank outputs

COMMUNICATIONS

- USB for PC configuration
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- CAN engine support (Tier 4F / Stage 5)
- Conventional engine support (Hz)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- 3-phase generator sensing
- Sophisticated alarms including water in fuel and tank bund
- 0-10 V & 4-20 mA oil pressure sensor support
- ECU periodic wake up for information retrieval
- Comprehensive engine and alternator protections
- Generator / load power & current monitoring and protection

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

4510-05 - 4510 MKII Auto Start Control Module

4510-06 - 4510 MKII Auto Start Control Module (Htr)

OVERALL SIZE

140 mm x 113 mm x 43 mm (5.5" x 4.4" x 1.5")

PANEL CUT-OUT SIZE

118 mm x 92 mm (4.6" x 3.6")



DSE3210 Manual & Auto Start Control Module



PRODUCT HIGHLIGHTS

I/O

- Configurable inputs (6)
- Configurable DC outputs (2)
- Fuel and start outputs
- Remote start input

COMMUNICATIONS

- USB for PC configuration

ENGINE COMPATIBILITY

- Conventional engine support (MPU & Hz)

CONFIGURATION

- DSE Configuration Suite PC software

FEATURES

- Configurable timers and alarms
- Alternative configuration
- Tamper-proof hours counter
- Engine monitoring and protections
- Automatic shut-down
- Displays generator voltage, generator frequency, battery voltage and engine speed

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

3210-01 - 3210 Manual & Auto Start Control Module

OVERALL SIZE

98 mm x 79 mm x 40 mm (3.9" x 3.1" x 1.6")

PANEL CUT-OUT SIZE

80 mm x 68 mm (3.1" x 2.7")



DSE3110 Manual & Auto Start Control Module



PRODUCT HIGHLIGHTS

I/O

- Configurable inputs (6)
- Configurable DC outputs (2)
- Fuel and start outputs (configurable on CAN variant)
- Remote start input

COMMUNICATIONS

- USB for PC configuration

ENGINE COMPATIBILITY

- CAN engine support
- Conventional engine support (MPU & Hz)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel

FEATURES

- Configurable timers and alarms
- Alternative configuration
- Tamper-proof hours counter
- Engine monitoring and protections
- Automatic shut-down
- Displays generator voltage, generator frequency, battery voltage and engine speed

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

3110-01 - 3110 Manual & Auto Start Control Module (MPU)

3110-02 - 3110 Manual & Auto Start Control Module (CAN)

OVERALL SIZE

98 mm x 79 mm x 40 mm (3.9" x 3.1" x 1.6")

PANEL CUT-OUT SIZE

80 mm x 68 mm (3.1" x 2.7")



DSE402 MKII Waterproof Manual & Auto Start Control Module



OVERALL SIZE

157 mm x 111 mm x 60 mm (6.2" x 4.4" x 2.4")

PANEL CUT-OUT SIZE

132 mm x 84 mm (5.2" x 3.4")

PRODUCT HIGHLIGHTS

I/O

- Inputs (4)
- Configurable remote start input
- Engine pre-heat output
- Fuel and start outputs

COMMUNICATIONS

- **DSE813** USB communications adapter (programming)

ENGINE COMPATIBILITY

- Conventional engine support (MPU & HZ)

FEATURES

- Manual and automatic start
- Engine protections
- LED warnings and shut-down
- Low oil pressure protection
- Engine pre-heat
- Potted electronics
- IP66 protection

Full list of features available at deepseaelectronics.com



PRODUCT VARIANTS

- 0402-03 - 402 MKII Waterproof Engine Control Module (MPU)
- 0402-04 - 402 MKII Waterproof Engine Control Module (HZ)



AUTO MAINS (UTILITY) FAILURE CONTROL MODULES

Hospitals across the UK and Europe are using the **DSE7320 MKII** for automatically resuming critical power supplies in times of unexpected power failures. The sophisticated built-in no-break return to mains (utility) feature, minimises power disruptions enabling vital services to continue without any interruption.

DSE7420 MKII Auto Mains (Utility) Failure Control Module



OVERALL SIZE

245 mm x 184 mm x 51 mm (9.6" x 7.2" x 2.0")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (8)
- Configurable analogue / digital inputs (6)
- Configurable outputs (8)
- Independent fuel & start outputs
- Configurable volt-free outputs (2)

COMMUNICATIONS

- SNMP, GET, SET & TRAP support
- MODBUS TCP IP / MODBUS RTU
- USB for PC configuration
- Simultaneous use of RS485, RS232 & Ethernet ports
- SCADA software
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- Conventional engine support (MPU & Hz)
- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- DSE Configuration Suite PC software
- Configurable front panel (PIN protected)

ADVANCED FEATURES

- Embedded web server
- Mains (utility) supply monitoring
- Automatic transfer between mains (utility) & generator
- Supports 7 languages
- Crank disconnect on generator voltage
- Oil pressure disconnect delay
- Configurable icon screens
- CAN support for DSEA108 AVR
- Charge alternator disable functionality
- Dedicated inputs for ECU specific operations
- Advanced PLC editor
- SMS alerts & control
- Dual mutual standby
- DSENet® expansion compatible



PRODUCT VARIANTS

- 7420-03 - 7420 MKII Auto Mains (Utility) Failure Control Module
- 7420-04 - 7420 MKII Auto Mains (Utility) Failure Control Module (Htr)

DSE7320 MKII Auto Mains (Utility) Failure Control Module



OVERALL SIZE

245 mm x 184 mm x 51 mm (9.6" x 7.2" x 2.0")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (8)
- Configurable analogue / digital inputs (6)
- Configurable DC outputs (6)
- Independent fuel and start outputs
- Configurable volt-free outputs (2)

COMMUNICATIONS

- Simultaneous use of RS485 & RS232 ports
- MODBUS RTU
- USB for PC configuration
- SCADA software
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- Conventional engine support (MPU & Hz)
- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- DSE Configuration Suite PC software

ADVANCED FEATURES

- Mains (utility) supply monitoring
- Automatic transfer between mains (utility) & generator
- Supports 7 languages
- Crank disconnect on generator voltage
- Oil pressure disconnect delay
- Configurable icon screens
- CAN support for DSEA108 AVR
- Charge alternator disable functionality
- Dedicated inputs for ECU specific operations
- Advanced PLC editor
- SMS alerts & control
- Dual mutual standby



PRODUCT VARIANTS

7320-03 - 7320 MKII Auto Mains (Utility) Failure Control Module

DSE7120 MKII Auto Mains (Utility) Failure Control Modules



OVERALL SIZE

240 mm x 181 mm x 42 mm (9.4" x 6.8" x 1.6")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (6)
- Configurable analogue / digital inputs (4)
- Configurable DC outputs (4)
- Configurable volt-free outputs (2)
- Configurable remote start input
- Independent fuel and start outputs
- Configurable staged loading outputs

COMMUNICATIONS

- USB for PC configuration
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- CAN engine support
- Conventional engine support (MPU & Hz)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- 3-phase mains (utility) sensing
- Automatic transfer between mains (utility) & generator
- 3-phase generator sensing
- Generator / load power & current monitoring
- 0-10 V & 4-20 mA oil pressure sensor support
- Fuel pump control
- Battery voltage monitoring
- Power save mode
- 1 alternative configuration
- Configurable fuel & start outputs when using CAN
- Real-time clock for scheduling and event monitoring



PRODUCT VARIANTS

7120-01 - 7120 MKII Auto Mains (Utility) Failure Control Module

DSE6120 MKIII Auto Mains (Utility) Failure Control Module



PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (8)
- Configurable digital / analogue inputs (4)
- Configurable DC outputs (6)
- Independent fuel and start outputs

COMMUNICATIONS

- USB for PC configuration
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- CAN engine support (Tier 4F / Stage 5)
- Conventional engine support (MPU & Hz)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- Mains (utility) supply monitoring
- Automatic transfer between mains (utility) & generator
- PLC editor
- Generator / mains (utility) current & power monitoring
- 0-10 V & 4-20 mA oil pressure sensor support
- Fuel level alarms
- 1 alternative configuration
- 3-phase generator sensing & protection
- 5-key menu navigation / front panel breaker control buttons
- DSENet® expansion compatible

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

6120-05 - 6120 MKIII Auto Mains (Utility) Failure Control Module

OVERALL SIZE

216 mm x 158 mm x 43 mm (8.5" x 6.2" x 1.5")

PANEL CUT-OUT SIZE

184 mm x 137 mm (7.2" x 5.3")



DSE4520 MKII Auto Mains (Utility) Failure Control Module



PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (4)
- Configurable analogue / digital inputs (3)
- Configurable DC outputs (4)
- Independent fuel and crank outputs

COMMUNICATIONS

- USB for PC configuration
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- CAN engine support (Tier 4F / Stage 5)
- Conventional engine support (Hz)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- 3-phase mains (utility) sensing
- Automatic transfer between mains (utility) & generator
- Configurable for use as an auto start or auto mains (utility) failure control module
- Sophisticated alarms including water in fuel and tank bund
- ECU periodic wake up for information retrieval
- Comprehensive engine and alternator protections
- Alternator frequency & CAN speed sensing
- Generator / load power & current monitoring and protection

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

4520-05 - 4520 Auto Mains (Utility) Failure Control Module

OVERALL SIZE

140 mm x 113 mm x 43 mm (5.5" x 4.4" x 1.5")

PANEL CUT-OUT SIZE

118 mm x 92 mm (4.6" x 3.6")





LOAD SHARING & SYNCHRONISING

DSE's load sharing control modules are used in off-grid mining applications in Texas and New Mexico. These applications have built-in redundancy ensuring sufficient capacity for at least one or two gensets to be off-line at any one time. This allows for maintenance, servicing and unplanned shut-downs.

The **DSE8610 MKII** is configured to automatically run the built-in redundancy feature. The modules communicate information to the site management team who supervise the site from a remote location.

DSE8920 7" Colour Load Share & Synchronising Control Module



Module can be configured to function as a DSE8910 Synchronising and Load Sharing Control Module

OVERALL SIZE

310 mm x 160 mm x 50 mm (12.2" x 7.2" x 2.0")

PANEL CUT-OUT SIZE

282 mm x 136 mm (11.1" x 5.4")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (12)
- Configurable analogue / digital inputs (4)
- Configurable flexible sender inputs (2)
- Configurable DC outputs (8)
- Configurable volt-free outputs (2)
- Configurable 5 stage dummy load and load shedding outputs

COMMUNICATIONS

- Independent ports for RS485, CAN, USB and Ethernet
- MODBUS RTU / TCP IP
- SNMP
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- Conventional engine support (MPU & Hz)
- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- DSE Configuration Suite PC software

COMPATIBLE LOAD SHARE MODULES

- DSE8660 MKII (When DSE8920 is configured as an DSE8910)

ADVANCED FEATURES

- 3-phase mains (utility) & generator voltage and current sensing
- 7-inch full colour TFT display
- Optically bonded, sunlight readable screen
- Hi-clarity 800 x 480 pixel graphical user interface
- Built-in AVR, Governor & CAN control
- Two types of KW/VAR sharing support (isochronous or droop)
- Drag and drop advanced PLC editor
- IEEE 1547TM - 2018 compliant
- Configurable for use as a DSE8910 via PC software
- 2 starting sequences: start all / start as load requires
- Peak lopping / load sharing
- Manual voltage / frequency adjustment
- RoCoF and vector shift protection
- Generator load demand
- Automatic hours run balancing
- Mains (utility) decoupling
- Bus failure detection
- Volts and frequency matching
- Dead bus synchronising
- DSENet® expansion compatible

Full list of features available at deepseaelectronics.com



PRODUCT VARIANTS

8920-01 - 8920 7" Colour Load Share & Synchronising Control Module



DSE8860

Auto Transfer Switch & Mains (Utility) Graphical Colour Display Control Module



OVERALL SIZE

245 mm x 184 mm x 50 mm (9.6" x 7.2" x 2.0")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (12)
- Configurable flexible sender inputs (2)
- Configurable outputs (10)
- Configurable volt-free outputs (2)

COMMUNICATIONS

- Independent ports for RS485, RS232, CAN, USB and Ethernet
- MODBUS RTU / TCP IP
- SCADA software
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- Conventional engine support (MPU & Hz)
- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

COMPATIBLE LOAD SHARE MODULES

- DSE8810

ADVANCED FEATURES

- Full colour graphical display screen
- 0-10 V & 4-20 mA oil pressure sensor support
- Power monitoring
- RoCoF and vector shift monitoring
- Peak lopping and peak shaving operation
- Generator load demand
- Automatic hours run balancing
- Mains (utility) de-coupling
- Advanced SMS messaging
- Advanced PLC editor
- Support for worldwide languages
- Data logging & trending
- Harmonics display for clear monitoring
- Dual processor for quick user response
- Start & stop via SMS messaging
- Additional display screens to help with modem diagnostics
- DSENet® expansion compatible

Full list of features available at deepseaelectronics.com



PRODUCT VARIANTS

8860-01 - 8860 Auto Transfer Switch & Mains (Utility)

DSE8810 Load Share Control with Graphical Colour Display



PARALLEL
32 SETS
 MAX



OVERALL SIZE

245 mm x 184 mm x 50 mm (9.6" x 7.2" x 2.0")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (11)
- Configurable analogue / digital inputs (4)
- Configurable flexible sender inputs (2)
- Configurable DC outputs (8)
- Configurable volt-free outputs (2)
- Configurable 5 stage dummy load and load shedding outputs

COMMUNICATIONS

- Independent ports for RS485, RS232, CAN, USB and Ethernet
- MODBUS RTU / TCP IP
- SCADA software
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- Conventional engine support (MPU & Hz)
- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

COMPATIBLE LOAD SHARE MODULES

- **DSE8860**

ADVANCED FEATURES

- Generator load demand with sequential set start
- 0-10 V & 4-20 mA oil pressure sensor support
- Power monitoring
- RoCoF and vector shift monitoring
- Automatic hours run balancing
- Sophisticated fuel monitoring and alarms
- 3-phase generator voltage and current sensing
- Sophisticated bus sensing
- Direct governor and AVR control
- Multiple configurable maintenance alarms
- Advanced SMS messaging
- Advanced PLC editor
- Support for worldwide languages
- Extensive data logging & trending
- Start & stop via SMS messaging
- DSENet® expansion compatible

Full list of features available at deepseaelectronics.com



PRODUCT VARIANTS

8810-01 - 8810 Load Share Control Module with Graphical Colour Display

DSE8610 MKII Synchronising & Load Sharing Control Module



OVERALL SIZE

245 mm x 184 mm x 51 mm (9.6" x 7.2" x 2.0")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (12)
- Configurable analogue / digital inputs (4)
- Configurable flexible sender inputs (2)
- Configurable DC outputs (8)
- Configurable volt-free outputs (2)
- Configurable 5 stage dummy load and load shedding outputs

COMMUNICATIONS

- Independent ports for RS485, RS232, CAN, USB and Ethernet
- MODBUS RTU / TCP IP
- SNMP
- SCADA software
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- Conventional engine support (MPU & Hz)
- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

COMPATIBLE LOAD SHARE MODULES

- DSE8660 MKII
- DSE8620 MKII


PRODUCT VARIANTS

- 8610-02 - 8610 MKII Synchronising & Load Sharing Control Module
- 8610-03 - 8610 MKII Synchronising & Load Sharing Control Module (Htr)

ADVANCED FEATURES

- Generator load demand with sequential set start
- 0-10 V & 4-20 mA oil pressure sensor support
- Power monitoring
- RoCoF and vector shift monitoring
- Automatic hours run balancing
- Sophisticated fuel monitoring and alarms
- 3-phase generator voltage and current sensing
- Sophisticated bus sensing (3-phase)
- Direct governor and AVR control
- Multiple configurable maintenance alarms
- Advanced SMS messaging
- Advanced PLC editor
- Support for worldwide languages
- Extensive data logging & trending
- Start & stop via SMS messaging
- DSENet® expansion compatible
- Option to use as a rear-mounted solution using a DSE rear mount panel bracket (020-1044)

Full list of features available at deepseaelectronics.com

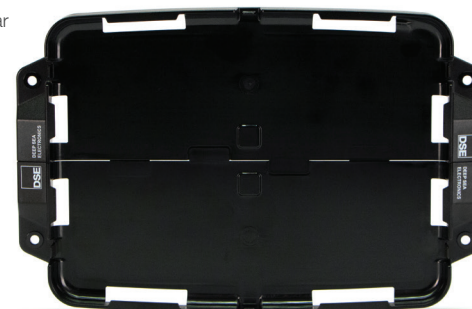

Rear Mount Panel Bracket
(020-1044)



DSE8620 MKII

Synchronising & Load Sharing Auto Mains (Utility) Failure Control Module



Module can be configured to function as a **DSE8610 MKII** Synchronising and Load Sharing Control

OVERALL SIZE

245 mm x 184 mm x 51 mm (9.6" x 7.2" x 2.0")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (12)
- Configurable analogue / digital inputs (4)
- Configurable flexible sender inputs (2)
- Configurable DC outputs (8)
- Configurable volt-free outputs (2)
- Independent fuel and crank outputs
- Configurable 5 stage dummy load and load shedding outputs

COMMUNICATIONS

- Independent ports for RS485, RS232, CAN, USB and Ethernet
- MODBUS RTU / TCP IP
- SNMP
- SCADA software
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- Conventional engine support (MPU & Hz)
- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

COMPATIBLE LOAD SHARE MODULES

- **DSE8660 MKII** (When **DSE8620 MKII** is configured as an **DSE8610 MKII**)
- **DSE8610 MKII**

ADVANCED FEATURES

- 3-phase mains (utility) & generator voltage and current sensing
- 0-10 V & 4-20 mA oil pressure sensor support
- Peak lopping and peak shaving functionality
- kW & kV Ar load sharing
- RoCoF and vector shift protection
- Automatic mains (utility) decoupling with no-break return
- Positive & negative kVAr export control
- Volts and frequency matching
- Sophisticated fuel monitoring and alarms
- Direct governor and AVR control
- Multiple configurable maintenance alarms
- Advanced SMS messaging
- Advanced PLC editor
- Support for worldwide languages
- Extensive data logging & trending
- Start & stop capability via SMS messaging
- DSENet® expansion compatible

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

8620-02 - 8620 Synchronising & Load Sharing Auto Mains (Utility) Failure Control Module



DSE8660 MKII

Auto Transfer Switch & Mains (Utility) Control Module



OVERALL SIZE

245 mm x 184 mm x 51 mm (9.6" x 7.2" x 2.0")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (11)
- Configurable DC outputs (6)
- Configurable volt-free outputs (2)

COMMUNICATIONS

- Independent ports for RS485, RS232, CAN, USB and Ethernet
- MODBUS RTU / TCP IP
- SCADA software
- DSEWebNet® compatible

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

COMPATIBLE LOAD SHARE MODULES

- DSE8610 MKII
- DSE8620 MKII (When DSE8620 MKII is configured as an DSE8610 MKII)


ADVANCED FEATURES

- 3-phase mains (utility) voltage and current sensing
- Peak lopping and peak shaving functionality
- kW & kV Ar load sharing
- RoCoF and vector shift protection
- Mains (utility) kW export protection
- Automatic mains (utility) decoupling with no-break return
- Generator load demand
- Advanced SMS messaging
- Advanced PLC editor
- Support for worldwide languages
- Data logging & trending
- Multiple event scheduler
- Native no bus breaker support for signal ATS applications
- Separate ramp up and ramp down rates configurable via PLC
- DSENet® expansion compatible
- Option to use as a rear-mounted solution using a DSE rear mount panel bracket (020-1044)

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

- 8660-02 - 8660 MKII Auto Transfer Switch & Mains (Utility) Control Module
- 8660-03 - 8660 MKII Auto Transfer Switch & Mains (Utility) Control Module (Htr)

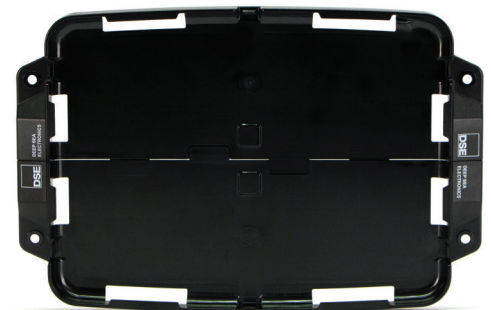

Rear Mount Panel Bracket
(020-1044)

DSE8680 Synchronising Generator Bus Tie Control Module



OVERALL SIZE

245 mm x 184 mm x 42 mm (9.4" x 6.8" x 1.6")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (11)
- Configurable DC outputs (6)
- Configurable volt-free outputs (2)

COMMUNICATIONS

- Independent ports for RS485, RS232, USB and Ethernet
- MODBUS RTU / TCP IP

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

COMPATIBLE LOAD SHARE MODULES

- DSE86xx
- DSE86xx MKII
- DSE87xx

ADVANCED FEATURES

- Enhanced bus sensing of 2 buses for improved synchronising functionality
- Multiple DSE8680's can be used within one synchronising system
- Advanced PLC editor
- Instrumentation shows the status and measurements of both buses
- Advanced SMS control and fault messaging
- Supports multiple global languages
- Easy access diagnostic pages including modem diagnostic pages
- Advanced data logging and trending
- Eliminates the need for costly PLC systems
- DSENet® expansion compatible

Full list of features available at deepseaelectronics.com




PRODUCT VARIANTS

8680-01 - 8680 Synchronising Generator Bus Tie Control Module

DC / HYBRID GENERATOR CONTROL MODULES

DSE modules are being used in hybrid applications where solar energy is consistent and mains (utility) supplies are unreliable. This factory in the Middle East is connected to a mains (utility) supply which suffers from regular disruptions.

The **DSEM870** PV / Diesel Load Sharing FSC works in conjunction with **DSE8610 MKII** control modules to provide cost efficient energy from the hybrid solar / diesel genset system when mains (utility) power is unavailable.

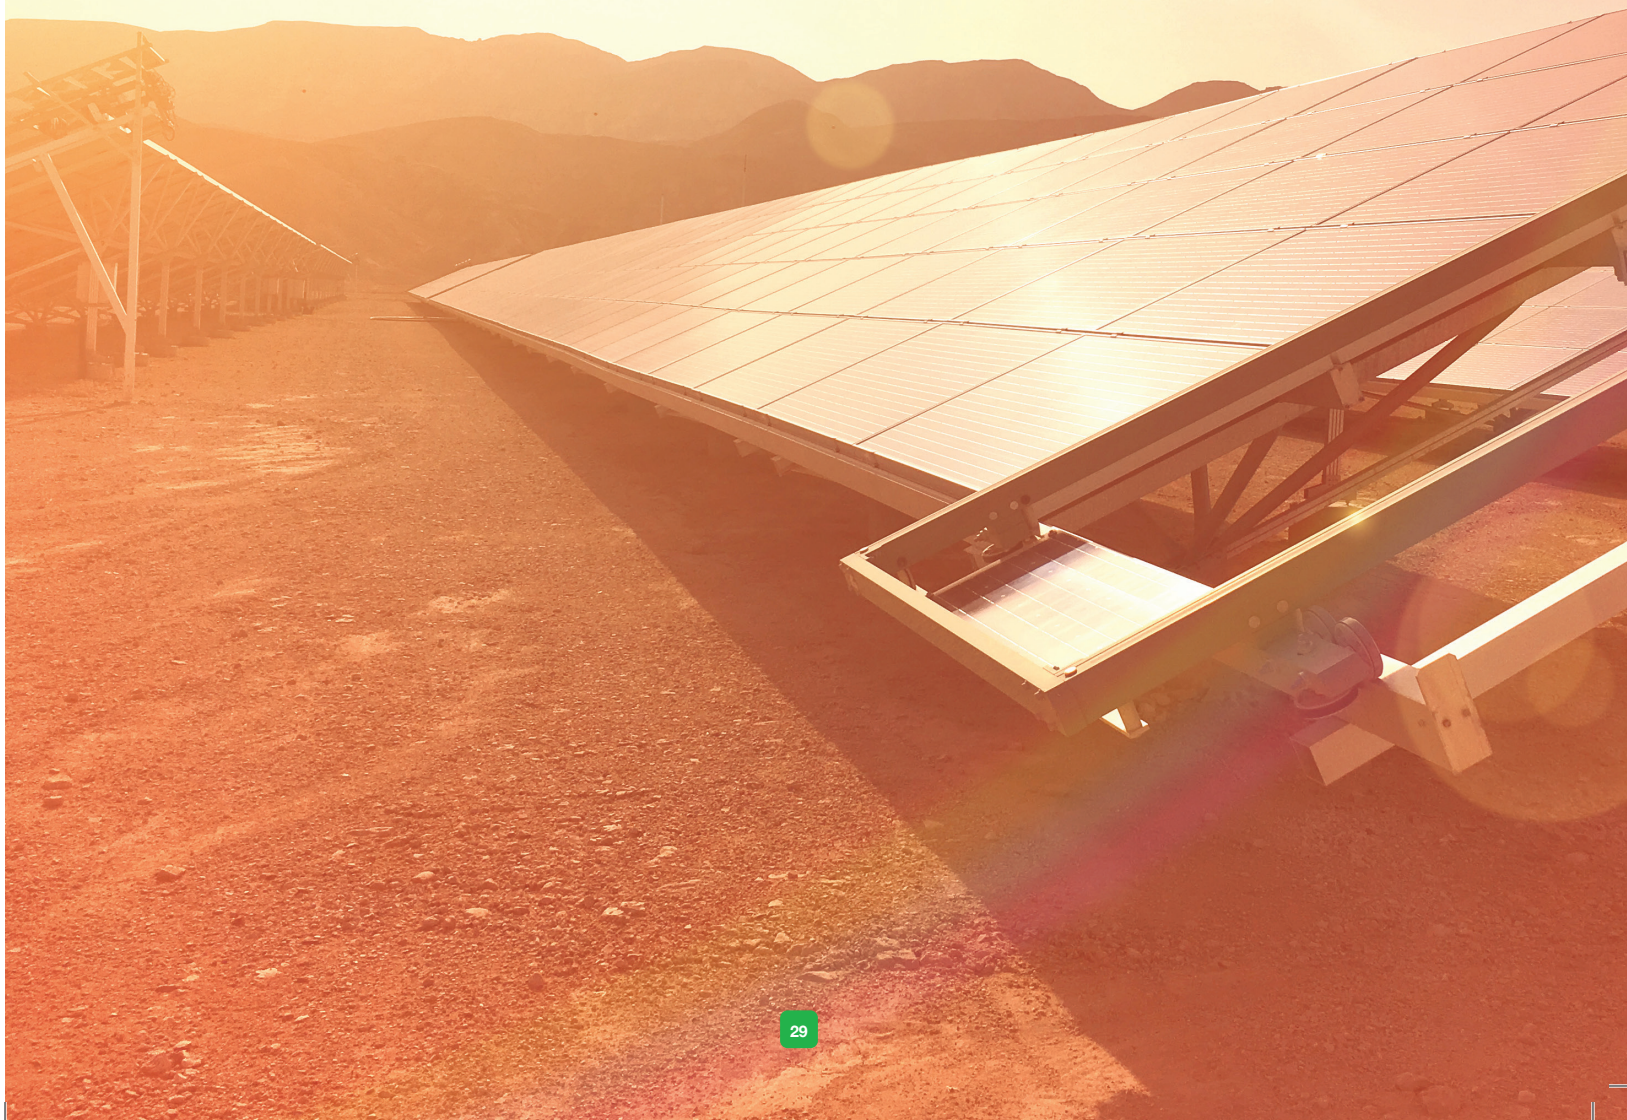


On-Grid Load Sharing & Synchronising Solutions for Renewable Applications

When the mains (utility) is supplying the load the inverters produce as much power as possible.

When the mains (utility) is unavailable the gensets start and supply power to the load. At this time the inverters are able to re-sync and supply power.

As the inverter power increases, the dependency on the gensets reduces and the gensets begin to shut down. Whenever the mains (utility) power is unavailable, one genset must continue to run at all times. To prevent damage to this genset the inverters are instructed to reduce power, so that the genset can maintain its minimum operating load.

For more information please visit:
www.deepseaelectronics.com

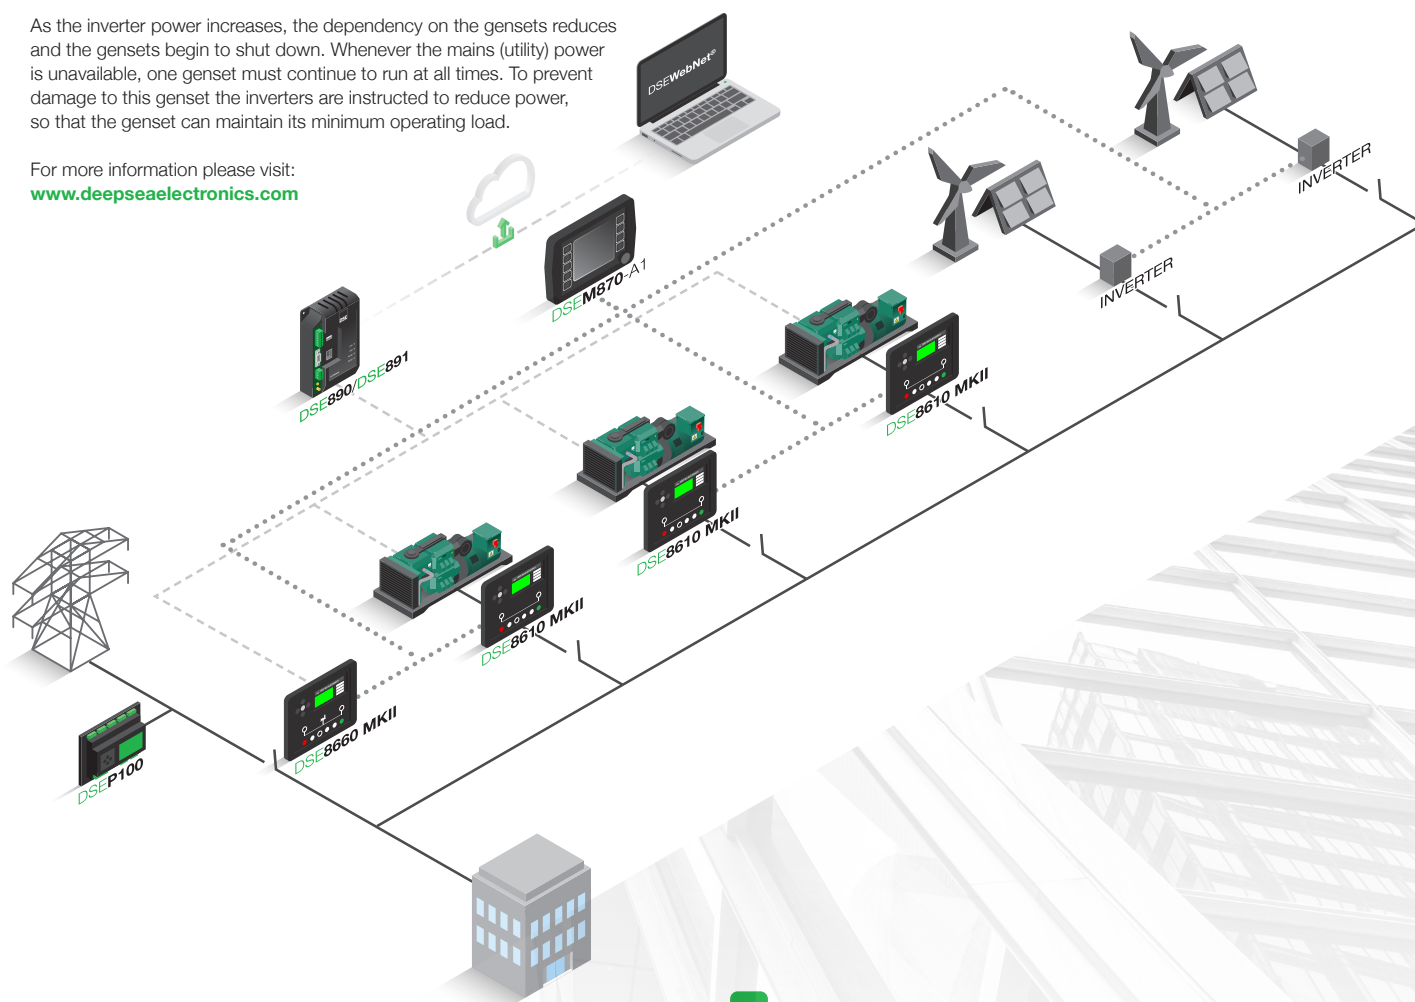



DSEM870 PV / Diesel Load Sharing FSC

PV / Diesel Load Sharing Fuel Save Controller for Solar and Wind Applications



IP67

NEMA6



OVERALL SIZE

272 mm x 165 mm x 81 mm (10.8" x 6.3" x 3.15")

PANEL CUT-OUT SIZE

231 mm x 133 mm (9.09" x 5.24")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital outputs (4)

COMMUNICATIONS

- Ethernet
- USB

ADVANCED FEATURES

- Communicates with the genset using DSE GenComm protocol, removing the need for additional CTs
- Displays fuel usage and economy info from compatible DSE controllers
- Log of all three sources: genset / solar / inverter
- Pi chart or histogram displays % supply load info
- Displays sunrise / sunset times
- Provides sun position and height
- Supports up to 20 inverters + 10 load sharing genset controllers in one system
- Sophisticated reverse power monitoring provides a stable supply by preventing nuisance tripping
- High resolution, optically bonded 7" screen
- IP67 / NEMA 6 protection

PRODUCT VARIANTS

M870-A1 - M870 PV/Diesel Load Sharing FSC

DSE7450 DC / Hybrid Generator Control Module



OVERALL SIZE

240 mm x 172 mm x 57 mm (9.4" x 6.8" x 2.2")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable inputs (10)
- Configurable DC shunt inputs (2)
- Configurable DC outputs (6)
- Configurable volt-free outputs (2)
- Independent fuel and start outputs

EXPANSION CAPABILITY

- DSENet® compatible

COMMUNICATIONS

- Simultaneous use of RS485, RS232 & Ethernet ports
- MODBUS RTU / TCP IP
- USB for PC configuration
- DSEWebNet®

ENGINE COMPATIBILITY

- Conventional engine support (MPU & Hz)
- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- Configurable maintenance alarms (3)
- Configurable battery maintenance alarms (3)
- 0-10 V AVR output
- Fuel usage monitor and low level alarms
- Charge alternator failure alarm
- kW overload alarms
- Manual fuel pump control
- Manual & automatic start with configurable start / stop timers
- AC & DC voltage measurement
- Mains (utility) failure detection
- Dedicated load test button
- Comprehensive electrical protections
- PLC editor
- Multi-event exercise timer
- Automatically start / stop a generator based on depth of discharge of a battery bank

Full list of features available at deepseaelectronics.com



PRODUCT VARIANTS

7450-02 - 7450 DC/Hybrid Generator Control Module

DIGITAL AUTOMATIC VOLTAGE REGULATORS (AVR)

DSE digital automatic voltage regulators eliminate the complexities associated with traditional analogue AVRs and provide a stable AC output voltage regardless of changes in temperature or changes to the connected electrical load.

Suitable for any application including the most complex genset synchronising & load sharing applications, sophisticated features such as connections for a quadrature droop are included as standard.



DSEA109 / DSEA108 / DSEA106 MKII Digital Automatic Voltage Regulators (AVR)



The DSE digital automatic voltage regulator (AVR) range is designed to maintain regulated, smooth & stable AC output voltages, irrespective of the connected electrical load or changes in temperature.

The digital AVRs eliminate the complexities associated with analogue AVRs and are supplied by either a stator auxiliary winding or a shunt system taking power from the output windings.

Each variant is suitable for generator synchronising and load sharing (with connections for a quadrature droop), and other applications. A **DSE815** is required for programming.

DSEA109 Digital Automatic Voltage Regulator (AVR) with CAN Communications & PMG

PRODUCT HIGHLIGHTS

- Power input compatible with PMG, auxiliary and shunt windings (single phase / 3-phase)
- 3-phase or single phase generator output voltage sensing
- CAN port providing J1939 communications
- Soft start ramping
- Under frequency roll off (UFRO) protection with optional instantaneous step
- Loss of voltage sensing protection
- Over excitation protection
- Potted electronics

PRODUCT VARIANTS

A109-01 - A109 Digital AVR (CAN & PMG)

DSEA108 Digital Automatic Voltage Regulator (AVR) with CAN Communications

PRODUCT HIGHLIGHTS

- CAN port providing J1939 communications
- Soft start ramping
- Under frequency roll off (UFRO) protection with optional instantaneous step
- Loss of voltage sensing protection
- Over excitation protection
- Potted electronics

PRODUCT VARIANTS

A108-01 - A108 Digital AVR (CAN)

DSEA106 MKII Digital Automatic Voltage Regulator (AVR)

PRODUCT HIGHLIGHTS

- Soft start ramping
- Under frequency roll off (UFRO) protection with optional instantaneous step
- Loss of voltage sensing protection
- Over excitation protection
- Potted electronics

PRODUCT VARIANTS

A106-02 - A106 MKII Digital AVR (AUX)

Full list of features available at deepseaelectronics.com

OVERALL SIZES

DSEA109

180 mm x 145 mm x 61 mm (7.0" x 5.7" x 2.4")

DSEA108

179 mm x 108 mm x 61 mm (7.1" x 4.3" x 2.4")

DSEA106 MKII

179 mm x 108 mm x 61 mm (7.1" x 4.3" x 2.4")



MAINS (UTILITY) PROTECTION RELAYS & POWER METERS

The **DSEP100** Mains (Utility) Decoupling Relay is being used increasingly across Great Britain as changing regulations to grid codes are making G59 equipment obsolete.

The **DSEP100** is used to detect a fault on the mains (utility) network and disconnect the connected application under relevant circumstances. The **DSEP100** is fully configurable, making it future proof against further grid code changes.

DSEP100 Mains (Utility) Decoupling Relay



**G99/1
G98/1**
COMPLIANT



OVERALL SIZE
 157 mm x 95 mm x 67 mm (6.2" x 3.5" x 2.6")

The **DSEP100** is fully compliant with the latest G99/1, G98/1 and G59 requirements, RfG and other global standards for power applications connecting with local networks.

The **DSEP100** monitors the mains (utility) supply and on detection of a fault, disconnects the application to prevent an island being formed.

The **DSEP100** supports diesel gensets, PV (solar) installations and wind turbine applications.

PRODUCT HIGHLIGHTS

- 3 separate RoCoF protections
- Isolated AC / DC power supply
- Can be used to trip one or more breakers
- Incorrect phase sequence protection
- Lockable security tab to prevent configuration changes after commissioning
- Two stage under & over frequency protection
- Five stage under & over voltage protection
- Voltage asymmetry protection
- Vector shift protection
- Positive & negative sequence under/over voltage protection
- Zero sequence over voltage protection (NVD protection)
- Power up in trip position
- Breaker failed to open alarm
- True 3-phase mains (utility) RMS measurement
- Configurable automatic reset timer
- Future proofed to allow for changes in regulations
- Event log (250)
- DIN rail / chassis mount

COMMUNICATIONS

- RS485 (**DSE857** required)
- USB for PC configuration

CONFIGURATION

- DSE Configuration Suite PC Software

Full list of features available at deepseaelectronics.com



PRODUCT VARIANTS

P100-01 - P100 Mains (Utility) Decoupling Relay
 P100-02 - P100 Mains (Utility) Decoupling Relay (G99 Type Tested)

DSEP961 / DSEP962 **pView® Multi-Function Power Meters**



OVERALL SIZE

96 mm x 96 mm x 62 mm (3.8" x 3.8" x 2.4")

PANEL CUT-OUT SIZE

92 mm x 92 mm (3.6" x 3.6")

PRODUCT HIGHLIGHTS

I/O

- CT input terminals allow series connection of multiple power meters
- Configurable CT and VT ratio
- Pulse output
- Volt-free output

COMMUNICATIONS

- Built-in MODBUS RS485
- Web SCADA or Ethernet MODBUS TCP IP available with additional **DSEP915**

ADVANCED FEATURES

- Active energy class 0.5
- Multi metering for: frequency, current, voltage, power factor, active power, reactive power, apparent power
- Full energy monitoring
- Measured voltage 80 V to 500 V 50 Hz / 60 Hz (phase to phase)
- Harmonic analysis (THDV/THDI)

PRODUCT VARIANTS

P961-01 - **pView®** Multi-Function Power Meter
 (80 V AC to 265 V AC / 110 V DC to 300 V DC)

P962-01 - **pView®** Multi-Function Power Meter
 (11 V DC to 60 V DC)


P915-01 - **pView®** Ethernet Plug-In Adapter

Full list of features available at deepseaelectronics.com

DSEP915

pView® Ethernet Plug-In Adapter

The **DSEP915** Ethernet Plug-In Adapter is an optional module designed to be connected to the back of a **DSEP961** or **DSEP962** to provide Ethernet connectivity.

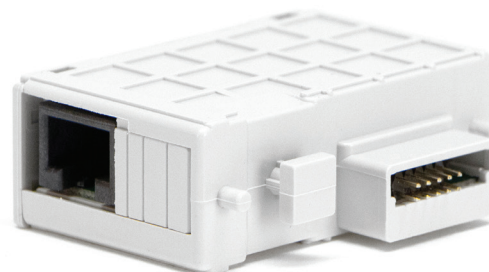

LIGHTING TOWER CONTROL MODULES

On-site engineers using lighting towers to illuminate their work space in large open cast mines in Colorado and Yukon, praise the **DSEL401 MKII** intelligent lighting tower control module. The sophisticated light sequencing, auto start / stop and timing features of the control module has significantly improved the mining company's operating efficiencies.



DSEL401 MKII Intelligent Lighting Tower Control Module



OVERALL SIZE

140 mm x 113 mm x 43 mm (5.5" x 4.4" x 1.7")

PANEL CUT-OUT SIZE

118 mm x 92 mm (4.6" x 3.6")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (6)
- Configurable analogue / digital inputs (3)
- Configurable DC outputs (8)
- Independent fuel and start outputs
- Configurable staged light control outputs

COMMUNICATIONS

- USB for PC configuration

ENGINE COMPATIBILITY

- CAN engine support (Tier 4F / Stage 5)
- Conventional engine support (MPU & Hz)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- Fuel monitoring allows automatic 'selected lights off' to enable longer running hours
- DC alternator compatibility
- Lighting tower mast and holding support control
- Automatic & manual light control
- Automatic light sequencing
- Individual lighting control
- Configurable light re-strike timer
- Light failure detection
- Sophisticated engine monitoring and protections
- 8 event scheduler and 4-stage load output, protects the generator from stalling on start-up
- Heated display option



PRODUCT VARIANTS

L401-01 - L401 MKII Intelligent Lighting Tower Control Module
 L401-02 - L401 MKII Intelligent Lighting Tower Control Module (Htr)

Full list of features available at deepseaelectronics.com



REMOTE OVERVIEW DISPLAYS

The **DSE8003 MKII** is used by engineers in this UK industrial production facility to remotely view the genset system providing power to vital factory equipment in the event of a mains (utility) failure. The load sharing genset system is situated in an adjacent building, so real-time remote monitoring of the system from the shop floor helps to maximise engineering resources.

DSE8004 10" Graphical Colour Multi-Set Remote Overview Display



TOUCHSCREEN



OVERALL SIZE

405 mm x 241 mm x 42 mm (15.7" x 9.2" x 1.6")

PANEL CUT-OUT SIZE

359 mm x 204 mm (14.1" x 8.0")

PRODUCT HIGHLIGHTS

I/O

- Configurable inputs / outputs (3)
- Volt-free change over output (1)

COMMUNICATIONS

- RS232, RS485 and Ethernet
- USB for PC configuration

COMPATIBLE LOAD SHARING MODULES

- **DSE86xx**
- **DSE86xx MKII**

CONFIGURATION

- DSE Configuration Suite PC software
- SCADA software

ADVANCED FEATURES

- High definition 10" screen presenting graphs, charts, metering, power and engine status information in full colour
- Configurable graphical user interface with software widgets
- High screen resolution for optimum clarity
- Touchscreen enabled
- Trend analysis
- View multiple modules within the same load sharing system (max 20)
- Connects via a data communication link up to a maximum distance of 1.2 km
- Powerful processor for fast operating response times
- Audible alarm



PRODUCT VARIANTS

Full list of features available at deepseaelectronics.com

8004-01 - 8004 10" Graphical Colour Multi-Set Remote Overview Display



DSE8003 MKII

7" Graphical Colour Multi-Set Remote Overview Display



TOUCHSCREEN



OVERALL SIZE

310 mm x 160 mm x 40 mm (12.2" x 6.3" x 1.5")

PANEL CUT-OUT SIZE

282 mm x 136 mm (11.1" x 5.3")

PRODUCT HIGHLIGHTS

I/O

- DC alarm outputs (2)

COMMUNICATIONS

- RS232, RS485 and Ethernet
- USB for PC configuration

COMPATIBLE LOAD SHARING MODULES

- DSE86xx MKII

CONFIGURATION

- DSE Configuration Suite PC software
- SCADA software

ADVANCED FEATURES

- 7" LCD display presenting graphs, charts, metering, power and engine status information in full colour
- High screen resolution for optimum clarity
- Touchscreen enabled
- View multiple modules within the same load sharing system (max 20)
- Connects via a data communication link up to a maximum distance of 1.2 km
- Enhanced graphical user interface
- Powerful processor for fast operating response times
- Audible alarm
- Configurable as a single-set remote overview display



PRODUCT VARIANTS

8003-02 - 8003 MKII 7" Graphical Colour Multi-Set Remote Overview Display

Full list of features available at deepseaelectronics.com



DSE7310 MKII / DSE7320 MKII

Configured as **DSE2510 MKII / DSE2520 MKII**

Auto Start Remote Display Module / Auto Mains (Utility) Failure Remote Display Module



OVERALL SIZE

245 mm x 184 mm x 51 mm (9.6" x 7.2" x 2.0")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable DC outputs (2)

ADVANCED FEATURES

- 2 display modules can be connected to 1 host control module
- RS232, RS485 & DSENet® connection to host control module
- Remote displays can be located up to 1.2 km from the host module
- Designed to replicate the instrumentation, control and monitoring capabilities of the host control module
- Remote displays connected to the same system show the same information screens at all times
- The host controller can be set to show different information to the connected remote displays
- Audible alarm
- Five-key menu navigation

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

NB: The **DSE2510 MKII** and **DSE2520 MKII** are firmware variants of the **DSE7310 MKII** and **DSE7320 MKII**. To configure as a remote display, a standard **DSE7310 MKII** or **DSE7320 MKII** should be ordered and configured using the DSE Configuration Suite software.



PRODUCT VARIANTS

- 7310-03 - 7310 MKII Auto Start Control Module
- 7310-04 - 7310 MKII Auto Start Control Module (Htr)
- 7320-03 - 7320 MKII Auto Mains (Utility) Failure Control Module
- 7320-04 - 7320 MKII Auto Mains (Utility) Failure Control Module (Htr)

REMOTE MONITORING SOFTWARE

A major international OEM utilises DSE**WebNet**® to monitor a fleet of gensets across Algeria that are powering a wide variety of critical applications including telecoms, banking, petroleum and industry.

DSE**WebNet**® provides the OEM with key system information for engineer analysis, ensuring accurate diagnoses can be made to avoid major long-term problems. The OEM is able to take full control of the genset and issue commands when required to maximise run-time.

DSE**WebNet**® also enables the OEM to improve its operating efficiencies, by providing detailed site operating information prior to engineers being sent out to site.



DSEWebNet®

Advanced Remote Monitoring of Gensets, Pumps & Compressors



DSEWebNet® Industry-leading online management tool for remote monitoring of generators, pumps and compressors.


Provides 24/7 access to multiple applications from anywhere in the world.

DSEWebNet® has been developed to support remote monitoring of single and multi-set generator systems, pump and compressor applications, being controlled by DSE products*. The intelligent software includes mapping with static locations, real time instrumentation & control, event log tables and automatic system alerts. Alerts can be sent to multiple users via email and SMS. DSEWebNet® is available for laptop, desktop, tablet and smart phone use.



ADVANCED FEATURES

- User configurable access
- Single user or organisational accounts
- Configurable reporting
- Start / stop equipment
- Clear alarm conditions
- Configurable user interfaces
- App for mobile and tablet (iOS / Android)
- Geo-fencing and asset tracking
- Maintenance scheduling and logging
- Event triggers
- Works across any phone network

Key Industries:



Works Across Multiple Platforms:

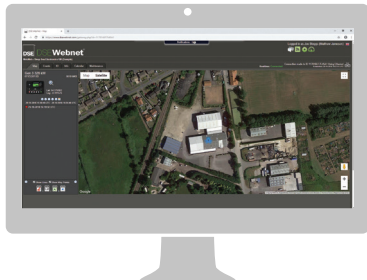

Full list of features available at deepseaelectronics.com



DSE890 MKII
DSEWebNet® Gateway 4G (GSM/Ethernet)
P/N: 0890-04
85 mm x 149 mm x 51 mm
(3.4" x 5.9" x 2.0")



DSE891
DSEWebNet® Gateway (Ethernet)
P/N: 0891-01
85 mm x 149 mm x 51 mm
(3.4" x 5.9" x 2.0")

DSEWebNet®





ADVANCED CLOUD BASED REMOTE MONITORING
SOFTWARE FOR MULTIPLE APPLICATIONS
AND EQUIPMENT TYPES



DSE8005 SCADA Suite Software



PRODUCT HIGHLIGHTS

COMPATIBLE MODULES

- DSE73xx / DSE73xx MKII
- DSE74xx / DSE74xx MKII
- DSE86xx / DSE86xx MKII
- DSE87xx
- DSE88xx

CONNECTION TO MODULES

- RS485
- Ethernet

OPERATING SYSTEMS

- Windows 10, 8, 7, Vista & XP operating systems
- Compatible with 32-bit & 64-bit operating systems

ADVANCED FEATURES

- Monitors up to a maximum of 40 DSE controllers in any combination of up to 32 generators and 16 mains (utilities)
e.g. 32 generators and 8 mains (utilities), 30 generators and 10 mains (utilities)
- User-friendly set up using the integral graphical design tool with simple drag and drop facility
- Compatible with touchscreen enabled PC's
- Engine start / stop
- Switching on and off load
- Load demand priority
- Mains (utility) base load power levels



DSE892 Simple Network Management Protocol (SNMP) Gateway



PRODUCT HIGHLIGHTS

ADVANCED FEATURES

- Status LEDs for each communications port
- DIN rail mounting
- Plug & socket connections
- Firmware upgradeable via USB
- SNMP SET to change controller mode
- SNMP GET for instrumentation
- Simple Internet browser configuration
- Controller event / operating status change SNMP TRAP email messaging
- Single gateway device can be connected to multiple controllers
- SNMP management system integration for third-party equipment monitoring
- Compatible with SNMP V2c specifications
- Monitor controller state, operating mode and alarms

COMPATIBLE MODULES

- Refer to DSE892 operators manual for control module compatibility

COMMUNICATIONS

- RS232, RS485, USB & Ethernet

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

0892-01 - 892 Simple Network Management Protocol (SNMP) Gateway

OVERALL SIZE

85 mm x 149 mm x 51 mm (3.4" x 5.9" x 2.0")

EXPANSION MODULES

Existing applications requiring additional features and functionality to meet newer, more demanding specifications are utilising DSE input and output expansion modules for system upgrades.

Many new installations also use expansion devices to meet the demands of complex applications.



DSE2548 / DSE2157 / DSE2152 Output Expansion Modules



DSE2548 DSENET® LED OUTPUT EXPANSION MODULE

PRODUCT HIGHLIGHTS **OUTPUTS**

- Configurable LEDs (8)
- Audible alarm with mute function

COMPATIBLE DSE MODULES

- DSE61xx MKIII
- DSE73xx MKII
- DSE74xx MKII
- DSE86xx MKII

FEATURES

- Up to ten DSE2548 modules can be linked together and connected to the host module up to a maximum distance of 1km away
- ID switch
- Flashing LED for 'link lost'

PRODUCT VARIANTS


2548-01 - 2548 LED Output Expansion Module

OVERALL SIZE

180 mm x 116 mm x 43 mm (7.1" x 4.6" x 1.7")

PANEL CUT-OUT SIZE

154 mm x 98 mm (6.0" x 3.9")



DSE2157 DSENET® OUTPUT EXPANSION MODULE

PRODUCT HIGHLIGHTS **OUTPUTS**

- Configurable, normally open, volt-free outputs (4)
- Configurable volt-free changeover outputs (4)

COMPATIBLE DSE MODULES

- DSE61xx MKIII
- DSE73xx MKII
- DSE74xx MKII
- DSE86xx MKII

FEATURES

- Relay contacts with LED indication
- Up to ten DSE2157 modules can be linked together and connected to the host module up to a maximum distance of 1km away
- ID switch
- Flashing LED for 'link lost'

PRODUCT VARIANTS

2157-01 - 2157 Output Expansion Module

OVERALL SIZE

165 mm x 76 mm x 49 mm (6.5" x 3.0" x 1.9")



DSE2152 DSENET® ANALOGUE OUTPUT EXPANSION MODULE

PRODUCT HIGHLIGHTS **OUTPUTS**

- Configurable analogue outputs (6)

COMPATIBLE DSE MODULES

- DSE61xx MKIII
- DSE73xx MKII
- DSE74xx MKII
- DSE86xx MKII

FEATURES

- Up to four DSE2152 modules can be linked together and connected to the host module up to a maximum distance of 1.2 km away
- ID switch
- Flashing LED for 'link lost'

PRODUCT VARIANTS

2152-01 - 2152 Analogue Output Expansion Module

OVERALL SIZE

165 mm x 76 mm x 49 mm (6.5" x 3.0" x 1.9")



**DSE2133 RTD/THERMOCOUPLE INPUT
EXPANSION MODULE**

PRODUCT HIGHLIGHTS
INPUTS

- RTD / thermocouple inputs (8)

COMPATIBLE DSE MODULES

- DSE61xx MKIII
- DSE73xx MKII
- DSE74xx MKII
- DSE86xx MKII

FEATURES

- Provides additional protections for temperature, engine, enclosure, etc.
- Up to four DSE2133 modules can be linked together (max 32 inputs) and connected to the host module up to a maximum distance of 1.2 km away
- ID switch
- Flashing LED for 'link lost'

PRODUCT VARIANTS

2133-01 - 2133 RTD / Thermocouple Input Expansion Module

OVERALL SIZE

165 mm x 76 mm x 49 mm (6.5" x 3.0" x 1.9")



**DSE2131 RATIOMETRIC INPUT
EXPANSION MODULE**

PRODUCT HIGHLIGHTS
RATIOMETRIC ANALOGUE INPUTS

- Inputs configurable for digital / resistive (10)

COMPATIBLE DSE MODULES

- DSE61xx MKIII
- DSE73xx MKII
- DSE74xx MKII
- DSE86xx MKII

FEATURES


- Up to four DSE2131 modules can be linked together and connected to the host module up to a maximum distance of 1.2 km away
- ID switch
- Flashing LED for 'link lost'

PRODUCT VARIANTS

2131-01 - 2131 Ratiometric Input Expansion Module

OVERALL SIZE

165 mm x 76 mm x 49 mm (6.5" x 3.0" x 1.9")



**DSE2130 INPUT
EXPANSION MODULE**

PRODUCT HIGHLIGHTS
INPUTS

- Digital inputs (4)
- Configurable analogue / digital inputs (4)

COMPATIBLE DSE MODULES

- DSE61xx MKIII
- DSE73xx MKII
- DSE74xx MKII
- DSE86xx MKII

FEATURES

- Up to four DSE2130 modules can be linked together and connected to the host module up to a maximum distance of 1.2 km away
- ID switch
- Flashing LED for 'link lost'

PRODUCT VARIANTS

2130-00 - 2130 Input Expansion Module

OVERALL SIZE

134 mm x 76 mm x 49 mm (5.3" x 3.0" x 1.9")



DSE813 / DSE815

USB COMMUNICATIONS ADAPTER / AVR USB COMMUNICATIONS ADAPTER



DSE813 USB COMMUNICATIONS ADAPTER

PRODUCT HIGHLIGHTS

The **DSE813** USB communications adapter has been developed to enable the **DSE701 MKII** manual / auto start control module, the **DSE402 MKII** manual / auto start control module and **DSE103 MKII** speed switch connect to a PC for programming.

PRODUCT VARIANTS

0813-01 - 813 USB Communications Adapter for 103 MKII/402 MKII
0813-02 - 813 USB Communications Adapter for 701 MKII

OVERALL SIZE

90 mm x 50 mm x 25 mm (3.5" x 2" x 1")



DSE815 AVR USB COMMUNICATIONS ADAPTER

PRODUCT HIGHLIGHTS

The **DSE815** USB communications adapter has been developed to enable the **DSE106 MKII** digital AVR, the **DSE108** digital AVR (CAN) and **DSE109** digital AVR (CAN / PMG) connect to a PC for programming.

PRODUCT VARIANTS

0815-01 - AVR USB Communications Adapter

OVERALL SIZE

90 mm x 50 mm x 25 mm (3.5" x 2" x 1")



DSE123 / DSE124

Load Sharing Expansion Modules

CE



DSE123 ANALOGUE LOAD SHARE LINES INTERFACE

PRODUCT HIGHLIGHTS

The **DSE123** allows DSE load sharing control modules to communicate with non-DSE load sharing control modules over universal analogue load share lines. This allows DSE control modules to be added to existing load share systems. Compatible with the **DSE5510**, **DSE7510**, **DSE8610** and **DSE8610 MKII**.

PRODUCT VARIANTS

0123-01 - 123 Analogue Load Share Lines Interface

OVERALL SIZE

161 mm x 78 mm x 76 mm (6.3" x 3.1" x 3.0")



DSE124 MSC/CAN EXTENDER

PRODUCT HIGHLIGHTS

The **DSE124** is designed to extend a multi-set comms (MSC) load share link or engine CAN bus. Multiple **DSE124s** can be linked together. The extenders can be located between 250 meters and 2000 meters apart, depending on the module variant being used. Compatible with the **DSE55xx**, **DSE75xx**, **DSE86xx** and **DSE86xx MKII**.

PRODUCT VARIANTS

0124-01 - 124 CAN bus Extender (Fibre Optic)
0124-02 - 124 CAN bus Extender (Non Fibre Optic)

OVERALL SIZE

134 mm x 77 mm x 49 mm (5.3" x 3.0" x 1.9")



DSEControl®

DSE**Control**® is an extremely powerful collection of programmable controllers and displays for vehicles and off-highway machinery and a dynamic range of control systems for engines, pumps and compressors.

Our specialist team of development engineers have created a range of products that combine outstanding performance, features and reliability, making each product suitable for use across multiple

VISIT US AT



MARCH 10-14, 2020
BOOTH: B93602

SUITABLE FOR:



EMERGENCY VEHICLES



MILITARY



CONSTRUCTION




MUNICIPAL VEHICLES



AGRICULTURAL



TRANSPORT &
LOGISTICS



ENGINES



COMPRESSORS



PUMPS

VEHICLE & OFF-HIGHWAY MACHINERY CONTROL SYSTEMS

DSE's range of programmable controllers are installed on construction machinery all over the world.

DSEM64x controllers provide users with powerful solutions that meet complex control requirements. Key areas of control include hydraulic movement control, engine control and CAN device interfacing.



DSEM870 7" Programmable Display



TOUCHSCREEN

OVERALL SIZE

272 mm x 165 mm x 81 mm (10.8" x 6.3" x 3.15")

PANEL CUT-OUT SIZE

231 mm x 133 mm (9.09" x 5.24")

PRODUCT HIGHLIGHTS

- Can be used independently or in conjunction with **DSEM64x** programmable controls
- Fully programmable to meet the challenges of multiple off-highway and vehicle applications
- Designed for in-cab or panel mounting
- Equipment controls can be incorporated into the **DSEM870** display for simplified user operation
- Clear information is presented on the screen in graphic, text and icon formats
- Camera inputs offer enhanced operator viewing and safer equipment control
- Outstanding response & performance through powerful processors, internal components and superior electronic design
- E11 type approval
- IP67 / NEMA 6 protection

I/O

- Configurable inputs with digital and analogue capability (4)
- Configurable digital outputs (4)
- Camera inputs (2)

COMMUNICATIONS

- Independent CAN interfaces (2), J1939, CAN Open and Raw CAN
- Ethernet interface
- USB

PROGRAMMING LANGUAGE

- CODESYS 3.5
- QT (on request)

ADVANCED FEATURES

- Robust HMI/programmable display specifically designed for mobile applications
- Optically bonded 7" colour screen for harsh environments
- Powerful ARM Cortex A9 processor with 800 MHz clock speed
- 512 MB of DDR3 SDRAM and 2 GB of NAND mass storage
- Touchscreen variant



PRODUCT VARIANTS

- M870-01 - M870 Programmable Display
- M870-02 - M870 Programmable Display (Touch-screen)

Full list of features available at deepseaelectronics.com



DSEM840

4.3" Programmable Display



IP67

NEMA6



OVERALL SIZE

131 mm x 208 mm x 56 mm (5.15" x 8.2" x 2.2")

PANEL CUT-OUT SIZE

163 mm x 98 mm (6.42" x 3.86")

PRODUCT HIGHLIGHTS

- Can be used independently or in conjunction with DSEM64x programmable controls
- Fully programmable to meet the challenges of multiple off-highway and vehicle applications
- Designed for in-cab or panel mounting
- Equipment controls can be incorporated into the DSEM840 display for simplified user operation
- Clear information is presented on the screen in graphic, text and icon formats
- Outstanding response & performance through powerful processors, internal components and superior electronic design
- IP67 / NEMA 6 protection

I/O

- Configurable inputs with digital and analogue capability (4)
- Configurable digital outputs (4)

COMMUNICATIONS

- Independent CAN interfaces (2), J1939, CAN Open and Raw CAN
- Ethernet interface
- USB

PROGRAMMING LANGUAGE

- CODESYS 3.5
- C (on request)

ADVANCED FEATURES

- Robust HMI/programmable display specifically designed for mobile applications
- Optically bonded 4.3" colour screen for the harshest environments
- Powerful Cortex M4 + M processor with 200 MHz clock speed
- 32 MB of SDRAM and 16 MB of flash storage



PRODUCT VARIANTS

M840-01 - M840 Programmable Display



DSEM835

3.5" Programmable Display



OVERALL SIZE

112.5mm x 115 mm x 49 mm (4.43" x 4.53" x 1.93")

PANEL CUT-OUT SIZE

80 mm / 3.15" Diameter

PRODUCT HIGHLIGHTS

I/O

- Configurable multi-functional inputs for digital, current, voltage & resistance (4)
- Outputs for external relays, LEDs and audible buzzer (3)

ENGINE COMPATIBILITY

- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- CODESYS 3.5

ADVANCED FEATURES

- Fully programmable CAN display
- CODESYS 3.5
- 3.5" 320 x 240 pixel optically bonded TFT display
- 4 configurable multi-functional inputs (digital, current, voltage, resistance)
- 3 flexible outputs for external relays, LEDs and audible buzzers
- Five backlit soft navigation keys
- 80 mm circular panel cutout for simple replacement of traditional gauges
- IP67 rating offers increased resistance to water ingress
- 120 Ω resistor (software switchable)
- Auto on/off heated display
- Industry standard Deutsch 18 pin connector
- Compatible with Tier 4 Final and Stage V engine parameters
- TSC 1 messaging for speed control



PRODUCT VARIANTS

M835-01 - M835 Programmable Display



DSEM640

Programmable Controller (68 I/O)



OVERALL SIZE

240 mm x 190 mm x 49 mm (9.45" x 7.48" x 1.46")

PRODUCT HIGHLIGHTS

- Can be used independently or in conjunction with DSEM840 / DSEM870 programmable displays
- Engineered for durability and reliability in the most extreme environmental conditions
- Tough die-cast aluminium for direct mounting to chassis or machine frameworks
- Sophisticated breather valve to equalise pressure and reduce condensation
- Outstanding response & performance through powerful processors, internal components and superior electronic design
- Fully programmable to meet the challenges of multiple off-highway and vehicle applications
- E11 type approval
- IP67 / NEMA 6 protection

I/O

- Configurable inputs with digital and analogue capability (32)
- Configurable outputs with digital, PWM and PWMi capability (36)

COMMUNICATIONS

- Independent CAN interfaces, J1939, CAN Open or Raw CAN (4)
- J1939 communications compatible with Tier 4F / Stage V
- Ethernet interface

PROGRAMMING LANGUAGE

- CODESYS 3.5
- C (on request)

ADVANCED FEATURES

- Powerful 32-bit processor with 220 MHz clock speed
- 4 MB application memory



PRODUCT VARIANTS

M640-01 – M640 Programmable Off-Highway Controller



DSEM643

Programmable Controller (34 I/O)



OVERALL SIZE

240 mm x 190 mm x 49 mm (9.45" x 7.48" x 1.46")

PRODUCT HIGHLIGHTS

- Can be used independently or in conjunction with **DSEM840** / **DSEM870** programmable displays
- Engineered for durability and reliability in the most extreme environmental conditions
- Tough die-cast aluminium for direct mounting to chassis or machine frameworks
- Sophisticated breather valve to equalise pressure and reduce condensation
- Outstanding response & performance through powerful processors, internal components and superior electronic design
- Fully programmable to meet the challenges of multiple off-highway and vehicle applications
- E11 type approval
- IP67 / NEMA 6 protection

I/O

- Configurable inputs with digital and analogue capability (16)
- Configurable outputs with digital, PWM and PWMi capability (18)

COMMUNICATIONS

- Independent CAN interfaces, J1939, CAN Open or Raw CAN (4)
- J1939 communications compatible with Tier 4F / Stage V
- Ethernet interface

PROGRAMMING LANGUAGE

- CODESYS 3.5
- C (on request)

ADVANCED FEATURES

- Powerful 32-bit processor with 220 MHz clock speed
- 4 MB application memory



PRODUCT VARIANTS

M643-01 – M643 Programmable Off-Highway Controller

Full list of features available at deepseaelectronics.com



DSEM240

CAN Slave Unit (44 I/O)



PRODUCT HIGHLIGHTS

I/O

- Configurable inputs with digital and analogue capability (20)
- Configurable outputs with digital, PWM and PWMi (24)

COMMUNICATIONS

- CAN interface, J1939 or CAN Open

ADVANCED FEATURES

- Engineered for durability and reliability in extreme environmental conditions
- Tough die-cast aluminium for direct mounting to chassis or machine frameworks
- Outstanding response & performance through powerful processors, internal components and superior electronic design
- Fully programmable to meet the extra challenges of complex off-highway and vehicle applications
- IP67 / NEMA 6 protection

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

M240-01 - M240 CAN Slave Unit (J1939)

M240-02 - M240 CAN Slave Unit (CAN Open)

OVERALL SIZE

240 mm x 190 mm x 49 mm (9.45" x 7.48" x 1.46")



DSEM040

M64X Development Kit



PRODUCT HIGHLIGHTS

- Breakout PCB for application development
- Set of connecting harnesses for plug & play
- Multiple power configurations
- Access to all inputs and outputs via sprung terminal blocks
- CAN interface via Sub D9 female connectors and sprung terminal blocks
- Individual power and ground connection via 4mm connectors
- Ethernet programming cable and USB data cable included
- Suitable for DSEM640 and DSEM643 controllers

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

M040-01 - M040 Development Kit

BREAKOUT PCB

320 mm x 210 mm x 46 mm (12.60" x 8.27" x 1.81")

CASE

437 mm x 379 mm x 160 mm (17.20" x 14.90" x 6.3")

ENGINE & PUMP CONTROLLERS

Mobile pumps are being used during times of severe flooding after heavy rainfall and riverbank breaches affect housing and developed areas across the USA.

Using the **DSEE800** controllers, the pumps drain the land into nearby unused areas and drainage ditches. Sophisticated data logging, particularly oil pressure and engine coolant temperature, allow maintenance engineers to keep the pumps running at optimum efficiency. Sophisticated communications through **DSEWebNet®** allow remote monitoring of the pumps throughout their 24/7 operation.





DSEE800

Engine Control Module



OVERALL SIZE

240 mm x 172 mm x 57 mm (9.4" x 6.8" x 2.2")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (11)
- Configurable ratio-metric inputs (12)
- Configurable DC outputs (4)
- Configurable volt-free outputs (2)
- Configurable PWMi outputs (4)
- Independent fuel and start outputs

COMMUNICATIONS

- User selectable RS232, RS485 & Ethernet communications
- MODBUS RTU & TCP IP
- USB for PC configuration
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- CAN engine support (Tier 4F / Stage 5)
- Conventional engine support (MPU & Hz)

CONFIGURATION

- DSE Configuration Suite PC software
- PIN protected front panel editor

ADVANCED FEATURES

- Float contact support
- Configurable timers and alarms
- 3 configurable maintenance alarms
- Built-in governor and clutch control
- Automatic and manual speed control
- Automatic speed ramping
- Fuel usage monitor and low fuel alarms
- Flexible automatic start control
- Advanced support for multiple languages
- Sophisticated data logging and trending reports
- Advanced SMS control including start / stop and fault messaging
- User configurable MODBUS pages
- Customisable status screens
- Multiple date and time engine scheduler
- PLC editor
- Modem diagnostics
- Protections disabled feature
- Backed-up real time clock
- DSENet® expansion compatible



PRODUCT VARIANTS

E800-01 - E800 Engine Control Module

Full list of features available at deepseaelectronics.com



DSE400 Engine Control Module



OVERALL SIZE

189 mm x 125 mm x 54 mm (7.5" x 4.9" x 2.1")

PANEL CUT-OUT SIZE

148 mm x 112 mm (5.8" x 4.4")

PRODUCT HIGHLIGHTS

I/O

- Configurable digital inputs (4)
- Configurable analogue inputs (7)
- Configurable digital outputs (4)
- Configurable DC outputs (2)
- Configurable PWM / PWMi outputs (2)
- Configurable analogue output (1)

COMMUNICATIONS

- RS485 communications
- MODBUS RTU
- USB for PC configuration
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- CAN engine support (Tier 4F / Stage 5)
- Conventional engine support (MPU & Hz)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- Sophisticated pump control for fill / empty, maintain fill / empty
- Configurable timers and alarms
- 3 configurable maintenance alarms
- Built-in governor and clutch control
- Manual and automatic speed control
- Automatic speed ramping
- Fuel usage monitor and low fuel alarms
- Flexible automatic start control
- Advanced support for multiple languages
- Protections disabled feature
- Customisable status and instrumentation screens
- Backed-up real time clock
- Multiple date and time engine scheduler
- Extensive event logging



PRODUCT VARIANTS

E400-01 - E400 Engine Controller
E400-02 - E400 Engine Controller (Htr)



DSEE100 Engine Control Module



OVERALL SIZE

140 mm x 113 mm x 43 mm (5.5" x 4.4" x 1.7")

PANEL CUT-OUT SIZE

118 mm x 92 mm (4.6" x 3.6")

PRODUCT HIGHLIGHTS

I/O

- Configurable analogue / digital inputs (3)
- Configurable digital inputs (4)
- Configurable remote start input
- Configurable DC outputs (4)
- Fuel and start outputs

COMMUNICATIONS

- USB for PC configuration
- DSEWebNet® compatible

ENGINE COMPATIBILITY

- Conventional engine support (MPU & W terminal)

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- 3 engine maintenance alarms
- Engine speed protection
- Comprehensive warning, controlled shut down or shut down protection on fault condition
- Engine hours counter
- Real-time clock for accurate event logging
- Engine pre-heat
- Engine run-time scheduler
- Battery voltage monitoring
- Large display screen
- Power save mode
- Start on low battery voltage



PRODUCT VARIANTS

E100-01 - E100 Engine Controller



OVERALL SIZE

112.5mm x 115 mm x 49 mm (4.43" x 4.53" x 1.93")

PANEL CUT-OUT SIZE

80 mm / 3.15" Diameter

PRODUCT HIGHLIGHTS

I/O

- Configurable multi-functional inputs for digital, current, voltage & resistance (4)
- Outputs for external relays, LEDs and audible buzzer (3)

ENGINE COMPATIBILITY

- CAN engine support (Tier 4F / Stage 5)

CONFIGURATION

- DSE Configuration Suite PC software

ADVANCED FEATURES

- 3.5" optically bonded TFT display screen
- 320 x 240 pixel display for high clarity viewing
- Auto on / off heated display screen
- Monitors engine speed, oil pressure, coolant temperature, fuel level & more
- TSC 1 messaging for speed control
- DTCs for the display of DM1 and DM2 diagnostic trouble codes
- Configurable CAN baud rate (250 kbit/s or 500 kbit/s)
- Configurable start-up screen and instrumentation pages
- Dark and light screen themes
- 80 mm circular panel cut-out for simple replacement of traditional gauges
- 120 Ω resistor software switchable
- Customised image display (30 screen support)
- IP67 / NEMA 6 protection
- Industry standard Deutsch 18 pin connector
- Low power / power save mode




PRODUCT VARIANTS

E050-01 - eView® Engine Display



DSE103 MKII

Speed Switch Control Module

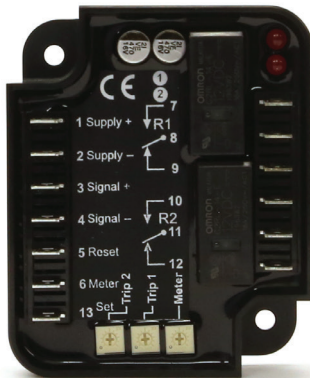

OVERALL SIZE

88 mm x 72 mm x 26 mm (3.4" x 2.8" x 1.0")

PRODUCT HIGHLIGHTS

ADVANCED FEATURES


- Configurable trip points
- Configurable nominal speed
- Trip points can be latching / non-latching
- Analogue meter output
- Potted electronics
- Spade terminals

COMMUNICATIONS

- DSE813 USB communications adapter (programming)

CONFIGURATION

- DSE Configuration Suite PC software

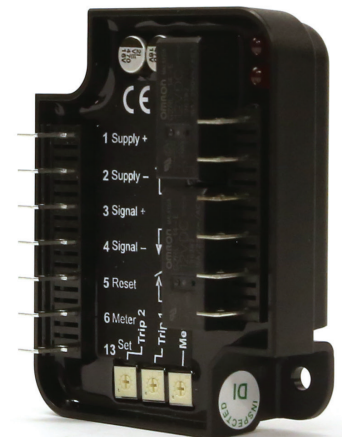

PRODUCT VARIANTS

0103-01 - 103MKII Speed Switch Control Module

Full list of features available at deepseaelectronics.com

The DSEControl® range features a wide selection of accessories for use with M-Series and E-Series products. Accessories include: connector sets, connector harness sets, configuration harnesses, Deutsch connectors, IP plugs, USB interface cables and Ethernet programming leads.



M640 Connector Set
(Part No. 007-035)
Set of 3 coded AMP SEAL
connectors with crimps / contacts




M640 Connector Harness Set
(Part No. 007-036)
Set of 3 coded AMP SEAL
connectors pre-wired with 1.2 metre
(3ft 11") cable



DT16 Deutsch Connector A
(Part No. 007-850)
18-way connector complete with pins



DT16 Deutsch Connector C
(Part No. 007-851)
18-way connector complete with pins



**ETHERNET PROGRAMMING
CABLE**
(PART NO. 016-160)
MJ12/RJ45 Ethernet cross-over
patch cable



USB Interface Cable
(Part No. 016-161)
M12 B-code / USB type A socket



M643 Connector Set
(Part No. 007-1020)
Set of 3 coded AMP SEAL
connectors with crimps / contacts



M643 Connector Harness Set
(Part No. 016-174)
Set of 3 coded AMP SEAL
connectors pre-wired with 1.2 metre
(3ft 11") cable



**M240 Connector Harness Set
(Part No. 016-175)**
Set of 3 coded AMP SEAL
connectors pre-wired with 1.2 metre
(3ft 11") cable



**M240 Connector Set
(Part No. 007-1021)**
Set of 3 coded AMP SEAL
connectors with crimps / contacts




**DT16 Connector IP Plug
(Part No. 020-1042)**
DT16 blanking plug




**M870 Connector Harness Set
(Part No. 016-176)**
Coded M870 connectors with 1.0
metre pre-wired cable




**M840 Connector Harness Set
(Part No. 016-168)**
Coded M840 connector pre-wired
with 1.0 metre cable



**E400 Connector Harness Set
(Part No. 007-852)**
Coded E400 connectors pre-wired
with 1.2 metre (3 ft 11") cable



**E050 Configuration Harness
(Part No. 016-177)**
Coded AMP SEAL connector
configuration harness pre-wired with
0.5 metre (1 ft 7 ") CAN cable and
1.0 metre (3 ft 3 ") DC power cable



**E050 Connector Harness
(Part No. 016-176)**
Coded AMP SEAL connector
harness pre-wired with 1.0 metre
(3ft 3 ") cable.



DSEPower®

DSEPower® is a range of 12 and 24 volt compact, vertical, intelligent, enclosed and dual output battery chargers, ranging from 2 amp to 30 amp. Each charger has been developed and manufactured by our specialist power engineering team.

All chargers within the range include multiple industry-leading features that are setting new standards in charging technology and enhancing multiple customer charging applications across a wide range of different industry sectors.

SUITABLE FOR:



CCTV



RAIL



SMOKE AOV



SHIPPING VESSELS



EMERGENCY VEHICLES



LIGHTING TOWERS




GENSETS



PUMPS



COMPRESSORS

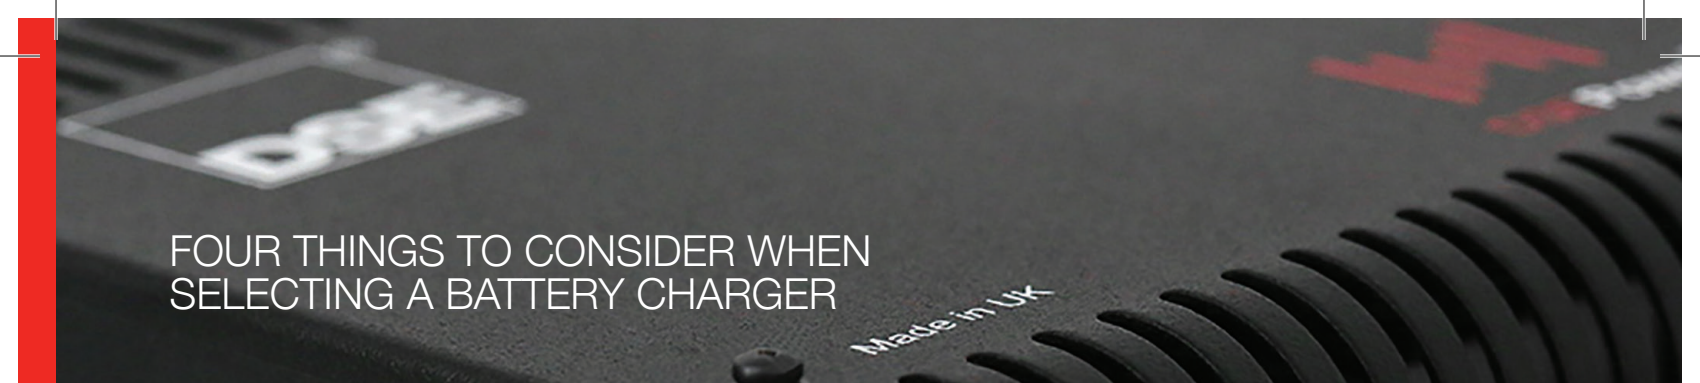

FOUR THINGS TO CONSIDER WHEN SELECTING A BATTERY CHARGER

BATTERY TYPE

Our battery chargers have a configurable float voltage making them suitable for most battery types (i.e. NiCd, lead acid, gel type).

If your battery manufacturer has specific charging requirements, these settings can be matched within our DSE Configuration Suite PC software and uploaded to your charger.

VOLTAGE

Both AC and DC voltages in and out of the battery charger must be considered. Our battery chargers are designed with a wide AC voltage input range of 90 V – 305 V AC for use all over the world. In addition to this, the DC output of the charger can be put in series or parallel.

Float voltage can be changed via an on-board pot to allow adjustments for specific battery requirements.

Each charging stage output voltage can be changed using our DSE Configuration Suite PC software.

CURRENT OUTPUT

It is advisable to use a battery charger with a current rating of 1:10 of the Ah capacity of the battery. For example a 100 Ah battery would need a 10 A battery charger.

This varies between battery chemistries and if you want to charge at a higher rate, your battery manufacturer will be able to advise you.

The DSE Configuration Suite PC software can be used to limit the maximum current output of your battery charger to perfectly suit your battery.

STANDING LOAD

The standing load on a battery is the main requirement for the charge current. The battery charger must be able to supply this current, with the remaining capacity used to charge the battery.

Battery charging top-up requires only a small amount above this, as bulk charging.

Example: for a 2 A standing load, a 5 A or 10 A battery charger is considered suitable for the majority of applications.

DSE chargers can be used as battery chargers, power supplies or both simultaneously.

12 VOLT BATTERY CHARGERS

Fishing boats typically contain large sophisticated battery back up systems. The DSE switch mode intelligent battery charger range is used to reliably charge and provide vital instrumentation for these battery types. Utilising the battery chargers MODBUS feature allows battery and charger status information to be viewed from a remote location.

This information would typically be displayed on a control panel on the bridge of the boat using a **DSE2541** remote battery charger display module.



DSE9702 12 Volt 5 Amp Vertical Charger



DIN RAIL MOUNTED

133 mm x 110 mm x 48 mm (5.2" x 4.3" x 1.9")

SCREW MOUNTED

153 mm x 112 mm x 48 mm (6.0" x 4.4" x 1.9")

PRODUCT VARIANTS

9702-01 - Vertical 12 Volt 5 Amp Battery Charger (90 V - 305 V 50 Hz / 60 Hz)

DSE9130 12 Volt 5 Amp Compact Charger



OVERALL SIZE

136 mm x 140 mm x 63 mm (5.4" x 5.5" x 2.5")

PRODUCT VARIANTS

9130-00 - 12 Volt 5 Amp Battery Charger (90 V - 305 V 50 Hz / 60 Hz)

9130-01 - 12 Volt 5 Amp Battery Charger (90 V - 305 V 50 Hz / 60 Hz) 9 Cell NiCd

9130-02 - 12 Volt 5 Amp Battery Charger (90 V - 305 V 50 Hz / 60 Hz) 10 Cell NiCd

PRODUCT HIGHLIGHTS - DSE9702 & DSE9130

FEATURES

- Constant current / constant voltage
- Automatic float mode return
- Low output ripple
- Reverse polarity, short-circuit and current limiting protection
- Auto recovery on fault condition removal
- Cell charge boost and equalizing
- Power save mode
- No moving parts – convection cooled
- Chargers can be linked together in parallel or series
- Charge fail output
- 80% operating efficiency
- Dedicated manual boost connection terminals
- DIN rail / chassis mount

COMPATIBILITY

- All DSE modules
- All common battery types

DSE9483 12 Volt 15 Amp Intelligent Charger



OVERALL SIZE

205 mm x 135 mm x 80 mm (8.1" x 5.3" x 3.1")

PRODUCT VARIANTS

9483-01 - 9483 12 Volt 15 Amp Intelligent Battery Charger (90 V - 305 V 50 Hz / 60 Hz)

PRODUCT HIGHLIGHTS - DSE9483 & DSE9484

ADVANCED FEATURES

- Intelligent two, three and four stage charging profiles
- Adjustable current limit
- Digital micro-processor technology
- Low output ripple and tight load & line regulation
- Customisable charging curves
- AC input under / over voltage alarms
- Battery charger over voltage protection
- Battery charger over current protection
- Battery under voltage alarm
- Auto battery detection
- Auto self-test function
- Output short circuit and inversion polarity with auto recovery
- Auto power de-rating at high ambient temperatures
- Optional battery temperature compensation using a PT1000 temperature sensor
- Cell charge boost & equalizing
- Boosts and equalises cell charge improving battery performance and life
- 86% operating efficiency
- DIN rail / chassis mount (DSE9484 chassis only)
- External remote display option (DSE2541)

DSE9484 12 Volt 30 Amp Intelligent Charger



OVERALL SIZE

240 mm x 263 mm x 89 mm (9.4" x 10.4" x 3.5")

PRODUCT VARIANTS

9484-01 - 12 Volt 30 Amp Intelligent Battery Charger (90 V - 305 V 50 Hz / 60 Hz)

COMMUNICATIONS

- MODBUS RTU using RS485
- USB

COMPATIBILITY

- All DSE modules
- All common battery types

CONFIGURATION

- DSE Configuration Suite PC software



24 VOLT BATTERY CHARGERS

Gensets all over the world are operating with DSE battery chargers. The standing load of a panel is the main requirement for the charge current. DSE battery chargers are able to supply the panel load current, with remaining capacity used to charge the battery. After an engine start, bulk charging is usually performed by the DC charging alternator and the battery charger is used to keep the battery full.

DSE9701 24 Volt 5 Amp Vertical Charger



DIN RAIL MOUNTED

133 mm x 110 mm x 48 mm (5.2" x 4.3" x 1.9")

SCREW MOUNTED

153 mm x 112 mm x 48 mm (6.0" x 4.4" x 1.9")

PRODUCT VARIANTS

9701-01 - Vertical 24 Volt 5 Amp Battery Charger (90 V - 305 V 50 Hz / 60 Hz)

DSE9255 24 Volt 5 Amp Compact Charger



OVERALL SIZE

136 mm x 140 mm x 63 mm (5.4" x 5.5" x 2.5")

PRODUCT VARIANTS

9255-00 - 24 Volt 5 Amp Battery Charger (90 V - 305 V 50 Hz / 60 Hz)

9255-01 - 24 Volt 5 Amp Battery Charger (90 V - 305 V 50 Hz / 60 Hz) 18 Cell NiCd

9255-02 - 24 Volt 5 Amp Battery Charger (90 V - 305 V 50 Hz / 60 Hz) 20 Cell NiCd

PRODUCT HIGHLIGHTS - DSE9701 & DSE9255

FEATURES

- Constant current / constant voltage
- Automatic float mode return
- Low output ripple
- Reverse polarity, short-circuit and current limiting protection
- Auto recovery on fault condition removal
- Cell charge boost and equalizing
- Power save mode
- No moving parts – convection cooled
- Chargers can be linked together in parallel or series
- Charge fail output
- 80% operating efficiency
- Dedicated manual boost connection terminals
- DIN rail / chassis mount

COMPATIBILITY

- All DSE modules
- All common battery types

Full list of features available at deepseaelectronics.com

Full list of features available at deepseaelectronics.com

DSE9470 MKII 12 Volt / 24 Volt 10 Amp Intelligent Battery Charger



OVERALL SIZE
200 mm x 130 mm x 70 mm (7.9" x 5.1" x 2.7")

PRODUCT HIGHLIGHTS - DSE9470 MKII

ADVANCED FEATURES

- Configurable for 12 V / 24 V operation
- Intelligent two, three and four stage charging profiles
- Adjustable current limit
- Digital micro-processor technology
- Low output ripple and tight load & line regulation
- Customisable charging curves
- AC input under / over voltage
- Battery charger over voltage protection
- Battery charger over current protection
- Battery under voltage alarm
- Auto battery detection
- Auto self-test function
- Output short circuit and inversion polarity with auto recovery
- Auto power de-rating at high ambient temperatures
- Optional battery temperature compensation using a PT1000 temperature sensor
- Cell charge boost & equalizing
- Configurable soft-start feature using DSE Configuration Suite software "View remaining charge time via SCADA"
- Digital input within SCADA
- Configurable bulk to absorption transmission
- 12 V / 24 V auto voltage battery detection
- Configurable charge termination
- Battery health check
- Battery voltage sensing (down to 1 V)
- Deep sleep mode
- PSU mode
- Automatic voltage detection (down to 1 V)
- Max current mode
- 86% operating efficiency
- DIN rail / chassis mount
- External remote LCD option (see **DSE2541**)

COMMUNICATIONS

- MODBUS RTU using RS485
- USB

COMPATIBILITY

- All DSE modules
- All common battery types including lithium-ion

CONFIGURATION

- DSE Configuration Suite PC software

PRODUCT VARIANTS

DSE9473 / DSE9474 / DSE9476 24 Volt 15 Amp / 20 Amp / 30 Amp Intelligent Battery Chargers

CE



DSE9473
15 Amp Intelligent Battery Charger

OVERALL SIZE

205 mm x 135 mm x 80 mm (8.1" x 5.3 x 3.1")

PRODUCT VARIANTS

9473-01 - 9473 24 Volt 15 Amp Intelligent Battery Charger (90 V - 305 V 50 Hz / 60 Hz)



DSE9474
20 Amp Intelligent Battery Charger

OVERALL SIZE

240 mm x 263 mm x 89 mm (9.4" x 10.4" x 3.5")

PRODUCT VARIANTS

9474-01 - 24 Volt 20 Amp Intelligent Battery Charger (90 V - 305 V 50 Hz / 60 Hz)



DSE9476
30 Amp Intelligent Battery Charger

OVERALL SIZE

183 mm x 233 mm x 76 mm (7.2" x 9.2" x 3.0")

PRODUCT VARIANTS

9476-01 - 24 Volt 30 Amp Intelligent Battery Charger (90 V - 305 V 50 Hz / 60 Hz)

PRODUCT HIGHLIGHTS - DSE9473, DSE9474 & DSE9476

ADVANCED FEATURES

- Intelligent two, three and four stage charging profiles
- Adjustable current limit
- Digital micro-processor technology
- Low output ripple and tight load & line regulation
- Customisable charging curves
- AC input under / over voltage alarms
- Battery charger over voltage protection
- Battery charger over current protection
- Battery under voltage alarm
- Auto battery detection
- Auto self-test function
- Output short circuit and inversion polarity with auto recovery
- Auto power de-rating at high ambient temperatures
- Optional battery temperature compensation using a PT1000 temperature sensor
- Cell charge boost & equalizing
- Boosts and equalises cell charge improving battery performance and life
- 86% operating efficiency
- DIN rail / chassis mount (DSE9474 & DSE9476 chassis only)
- External remote display option (DSE2541)

COMMUNICATIONS

- MODBUS RTU using RS485
- USB

COMPATIBILITY

- All DSE modules
- All common battery types

CONFIGURATION

- DSE Configuration Suite PC software



DUAL OUTPUT BATTERY CHARGERS

Leading manufacturers of fire and rescue vehicles have integrated the **DSE9462** intelligent dual output charger into multiple vehicle designs.

The **DSE9462** dual output charger gives vehicle manufacturers the flexibility to power 12 V ancillaries and charge a 24 V battery simultaneously. With a minimum operating efficiency of 90% and on-board CAN communication, the **DSE9462** is ideally suited for integration into a vehicles CAN bus communications system.

DSE9462 12 Volt / 24 Volt 10 Amp / 15 Amp Dual Output Intelligent Battery Charger



OVERALL SIZE
290 mm x 157 mm x 67 mm (9.4" x 10.4" x 3.5")

PRODUCT HIGHLIGHTS - DSE9462

ADVANCED FEATURES

- Intelligent two, three and four stage charging profiles
- Remote voltage sensing to compensate for voltage drop
- Independent adjustable current limit on both charge outputs. Output 1 (24 V) 15 amp max, output 2 (12 V) 10 amp max
- Simultaneously power 12 volt ancillary equipment and charge a 24 volt battery
- Automatic or manual boost and storage charge functions to help maintain battery condition
- Digital micro-processor technology
- Low output ripple
- Four red indicator LEDs
- AC input under voltage
- AC input over voltage
- Battery charger output over voltage
- Battery charger output over current
- Battery low voltage detection
- Output short circuit and inversion polarity with auto recovery
- Automatic power de-rating at high ambient temperatures
- Optional battery temperature compensation using a PT1000 temperature sensor
- Boosts and equalizes cell charge to improve battery performance and life
- ECO power mode
- Minimum 90% operating efficiency
- Chassis mount

COMMUNICATIONS

- J1939 CAN bus
- USB

COMPATIBILITY

- All DSE modules
- All common battery types

CONFIGURATION

- DSE Configuration Suite PC software



PRODUCT VARIANTS

Full list of features available at deepseaelectronics.com 9462-01 - 24 Volt 15 Amp & 12 Volt 10 Amp Dual Output Intelligent Battery Charger (110 V - 277 V 50 Hz / 60 Hz)

ENCLOSED BATTERY CHARGERS

Primarily used across the UK and Europe, DSE enclosed battery chargers can be found in a cross section of areas within the rail network industry. They are typically used on digital platform signs and on-board, within train carriages.



DSE9460 / DSE9461 12 Volt / 24 Volt 5 Amp Enclosed Intelligent Battery Chargers



PRODUCT VARIANTS

- 9460-01 - 12 Volt 5 Amp Enclosed Intelligent Battery Charger (Display)
- 9460-02 - 12 Volt 5 Amp Enclosed Intelligent Battery Charger (Display & Meters)
- 9460-11 - 24 Volt 5 Amp Enclosed Intelligent Battery Charger (Display)
- 9460-12 - 24 Volt 5 Amp Enclosed Intelligent Battery Charger (Display & Meters)
- 9461-01 - 12 Volt 10 Amp Enclosed Intelligent Battery Charger (Display)
- 9461-02 - 12 Volt 10 Amp Enclosed Intelligent Battery Charger (Display & Meters)
- 9461-11 - 24 Volt 10 Amp Enclosed Intelligent Battery Charger (Display)

OVERALL SIZE

165 mm x 305 mm x 110 mm (6.5" x 12.0" x 4.3")

PRODUCT HIGHLIGHTS - DSE9460 & DSE9461

ADVANCED FEATURES

- Intelligent two, three and four stage charging profiles
- Front panel control with multiple display variants
- Front panel meters (DSE9461 only)
- 12 V / 24 V configurable
- Adjustable current limit
- Can be used as a battery charger or power supply
- Manual & automatic boost
- Digital micro-processor technology
- Battery charging temperature compensation
- Low output ripple / excellent line regulation
- Customisable charging curves
- AC input over / under voltage
- Battery charger over voltage protection
- Battery charger over current protection
- Battery under voltage alarm
- 12 V / 24 V auto voltage battery detection
- Auto self test function
- Output short circuit and inversion polarity with auto recovery
- Auto power de-rating at high ambient temperatures
- Optional battery temperature compensation using a PT1000 temperature sensor
- Power save mode
- 86% operating efficiency
- Chassis mount
- External remote display option (DSE2541)

COMMUNICATIONS

- MODBUS RTU using RS485
- USB


COMPATIBILITY

- All DSE modules
- All common battery types

CONFIGURATION

- DSE Configuration Suite PC software

DSE2541 Remote Battery Charger Display Module

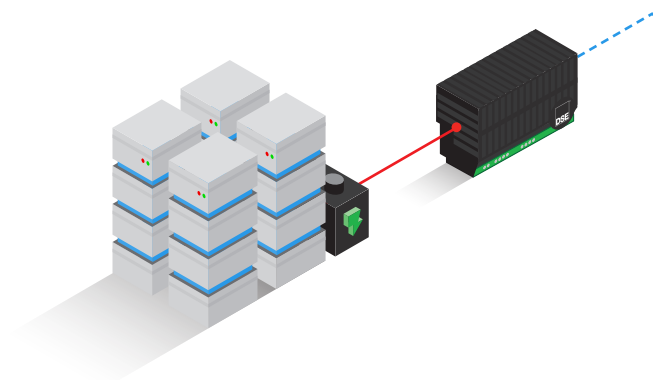

PRODUCT VARIANTS

The **DSE2541** remote battery charger display has been designed to work with our full range of intelligent and enclosed battery chargers. The display presents information to the operator on charge output, charge cycle, mains (utility) supply status and indicates when fault conditions are present.

ADVANCED FEATURES




Battery charger power and temperature monitoring



Alarm indication



Remote boost and battery charger output control




Mains AC voltage and frequency monitoring

OVERALL SIZE

140 mm x 113 mm x 43 mm (5.5" x 4.4" x 1.7")

PANEL CUT-OUT SIZE

118 mm x 92 mm (4.6" x 3.6")



DSEAts®

DSEAts® features an advanced range of automatic transfer switch control modules and power supplies.

Our dedicated development team have an in-depth understanding of ATS markets ensuring all products provide a perfect balance of advanced features and functionality relevant to the demands of the industry.

SUITABLE FOR:



TELECOMS



DATA CENTRES



HOSPITALS

AUTOMATIC TRANSFER SWITCH CONTROLLERS

This office block utilises two **DSE7310 MKII** auto start control modules located in the basement. Each floor of the building is connected to a **DSE335** auto transfer switch control. The auto transfer switch modules control the load transfer of each floor in a stepped sequence, to and from the generator supply in the event of a mains (utility) failure.

Applying the load in a stepped sequence prevents genset overload /system fail and the stepped return to mains (utility) enables the gensets to reduce their load prior to shutdown.

DSE335 Auto Transfer Switch Control Module



OVERALL SIZE

245 mm x 184 mm x 42 mm (9.6" x 7.2" x 1.6")

PANEL CUT-OUT SIZE

220 mm x 160 mm (8.7" x 6.3")

PRODUCT HIGHLIGHTS

I/O

- Configurable inputs (12)
- Configurable volt-free outputs (6)
- Configurable DC outputs (6)

COMMUNICATIONS

- Configurable for RS232 or RS485
- USB for PC configuration
- DSEWebNet® compatible

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- 3-phase monitoring of 2 independent AC supplies (S1 and S2)
- Additional display screens to help with modern diagnostics
- Source 1 / source 2 control
- Manual restore to S1
- Load switching (load shedding outputs)
- Check sync feature
- Power monitoring (kW h, kV Ar, kV A h, kV Ar h)
- Start and load inhibit
- Manual and automatic return
- Supports multiple topologies
- Rotary ATS configuration
- Configurable timers and alarms
- Multiple date and time scheduler
- PLC editor
- Real-time clock
- SMS messaging
- Configurable GenComm pages
- DSENet® compatible
- Compatible with DSE160 power supply



PRODUCT VARIANTS

0335-01 - 335 Auto Transfer Switch Control Module - 12/24 Volt DC Supply

Full list of features available at deepseaelectronics.com

DSE334 Auto Transfer Switch Control Module



OVERALL SIZE

215 mm x 158 mm x 42 mm (8.5" x 6.2" x 1.6")

PANEL CUT-OUT SIZE

182 mm x 137 mm (7.2" x 5.4")

PRODUCT HIGHLIGHTS

I/O

- Configurable inputs (10)
- Configurable outputs (5)

COMMUNICATIONS

- USB for PC configuration
- DSEWebNet® compatible

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- Automatic switch-over between supplies
- Source 1 / source 2 control
- Manual restore to S1
- Check sync feature
- Event log (10)
- Multiple topology support
- Front panel configuration
- External mains (utility) or generator failure inputs
- Compatible with **DSE160** power supply



PRODUCT VARIANTS

Full list of features available at deepseaelectronics.com

0334-01 - 334 Auto Transfer Switch Control Module - 12/24 Volt DC Supply

DSE331 Auto Transfer Switch Control Module



PRODUCT HIGHLIGHTS

I/O

- Configurable inputs (4)
- Configurable volt-free outputs (4)
- Configurable DC outputs (4)

COMMUNICATIONS

- USB for PC configuration

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- Automatic switch-over between supplies
- Source 1 / source 2 control
- Manual restore to S1
- Check sync feature
- Icon or text display
- Configurable timers
- Start inhibit & load inhibit
- Manual & automatic return
- Supports multiple topologies
- Rotary ATS configuration
- 3-phase display
- Compatible with **DSE160** power supply

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

0331-01 - 331 Auto Transfer Switch Control Module - 12/24 Volt DC Supply

OVERALL SIZE

180 mm x 116 mm x 42 mm (7.1" x 4.6" x 1.7")

PANEL CUT-OUT SIZE

154 mm x 98 mm (6.0" x 3.9")



DSE330 Auto Transfer Switch Control Module



PRODUCT HIGHLIGHTS

I/O

- Configurable inputs (2)
- Configurable outputs (6)

COMMUNICATIONS

- USB for PC configuration

CONFIGURATION

- DSE Configuration Suite PC software
- Front panel (PIN protected)

ADVANCED FEATURES

- Automatic switch-over between supplies
- Source 1 / source 2 control
- Manual restore to S1
- Icon or text display
- Configurable timers
- Start and load inhibit
- Supports multiple topologies
- Rotary ATS configuration
- Single event scheduler
- Single-phase display
- Compatible with **DSE160** power supply

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

0330-01 - 330 Auto Transfer Switch Control Module - 12/24 Volt DC Supply

OVERALL SIZE

98 mm x 79 mm x 40 mm (3.9" x 3.1" x 1.6")

PANEL CUT-OUT SIZE

80 mm x 68 mm (3.1" x 2.7")



DSE327 Auto Transfer Switch Control Module



PRODUCT HIGHLIGHTS

I/O

- Volt-free outputs (3)

CONFIGURATION

- Two precision time adjustable potentiometers

ADVANCED FEATURES

- Source 1 / source 2 control
- Self powered
- Configurable timers
- Automatic switch-over between supplies
- LED indicators
- DIN rail mount

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

- 0327-01 - 327 Auto Transfer Switch Control Module (230 Volt)
- 0327-02 - 327 Auto Transfer Switch Control Module (110 Volt)
- 0327-03 - 327 Auto Transfer Switch Control Module (230 Volt - 10 Second Delay)

OVERALL SIZE

72 mm x 90.5 mm x 65 mm (2.8" x 3.6" x 2.6")



DSE160 Self-Seeking Power Supply



PRODUCT HIGHLIGHTS

- 1 A output
- 12 V and 24 V variants
- Powered by mains (utility), generator or battery
- LED indicators
- Wide operating input voltage
- Output auto restart short circuit protection
- Output over voltage protection
- Less than 1% output ripple
- Can be used as an AC / DC power supply
- DIN rail / chassis mount
- Compatible with [DSE335](#), [DSE334](#), [DSE331](#), [DSE330](#) ATS controllers

Full list of features available at deepseaelectronics.com

PRODUCT VARIANTS

- 0160-00 - 12 Volt Self Seeking Power Supply (110 V-277 V 50 Hz/60 Hz)
- 0160-01 - 24 Volt Self Seeking Power Supply (110 V-277 V 50 Hz/60 Hz)

OVERALL SIZE

136 mm x 140 mm x 63 mm (5.4" x 5.5" x 2.5")



INDUSTRY-LEADING TECHNICAL SUPPORT

We are proud of the extensive support network we have in place across the world. Our specialist distributor network and in-house technical support experts work closely together to ensure we provide industry-leading support to customers 24 hours a day, 7 days a week.

Whether customers are looking to identify the right module for their applications, require professional advice on upgrade solutions / system design, need product installation advice or would like to discuss specific module features, we can be relied upon when we are needed the most.

For all support related queries, please contact our technical support teams:

T: +44 (0) 1723 890099

E: support@deepseaelectronics.com

USA/Canada

T: +1 (815) 316 8706

E: usasupport@deepseaelectronics.com



TELEPHONE



EMAIL



ONLINE



ON-SITE

CUSTOMER TRAINING

Our range of technical training seminars have a reputation across the world for being extremely informative, whilst being delivered in a clear, easy to follow format. We run seminars on a wide range of subjects from the most basic control system features to complex high-end applications.

To reinforce our commitment to providing industry-leading training to our customer base we have invested heavily in our UK and USA training facilities. This investment allows us to provide customers with hands-on training in safe operating environments.

On-site equipment includes modern load sharing genset systems, solar hybrid systems and large training suites that feature working control modules across our entire product range.

Our extensive range of training courses can also be delivered at customer premises.

For further information on DSE training courses, please email our technical support teams:

support@deepseaelectronics.com

USA/Canada

usasupport@deepseaelectronics.com

DEEP SEA ELECTRONICS LTD**TELEPHONE**

+44 (0)1723 890099

EMAIL

sales@deepseaelectronics.com

DEEP SEA ELECTRONICS INC**TELEPHONE**

+1 (815) 316 8706

EMAIL

usasales@deepseaelectronics.com

DEEP SEA ELECTRONICS INDIA**TELEPHONE**

+91 20 68195900

EMAIL

sales@deepseaelectronics.com



Deep Sea Electronics Ltd maintains a policy of continuous development and reserves the right to change the details shown in this product guide without prior notice. The contents are intended for guidance only.

Contact information for your local Distributor can be found in the box below. If the box is blank, please contact us directly.

**VISIT US AT****Middle East
Energy Dubai****MARCH 3-5, 2020
BOOTH: S1 C30****MARCH 10-14, 2020
BOOTH: B93602**